




HSC

Manual screen changer for extrusion processes

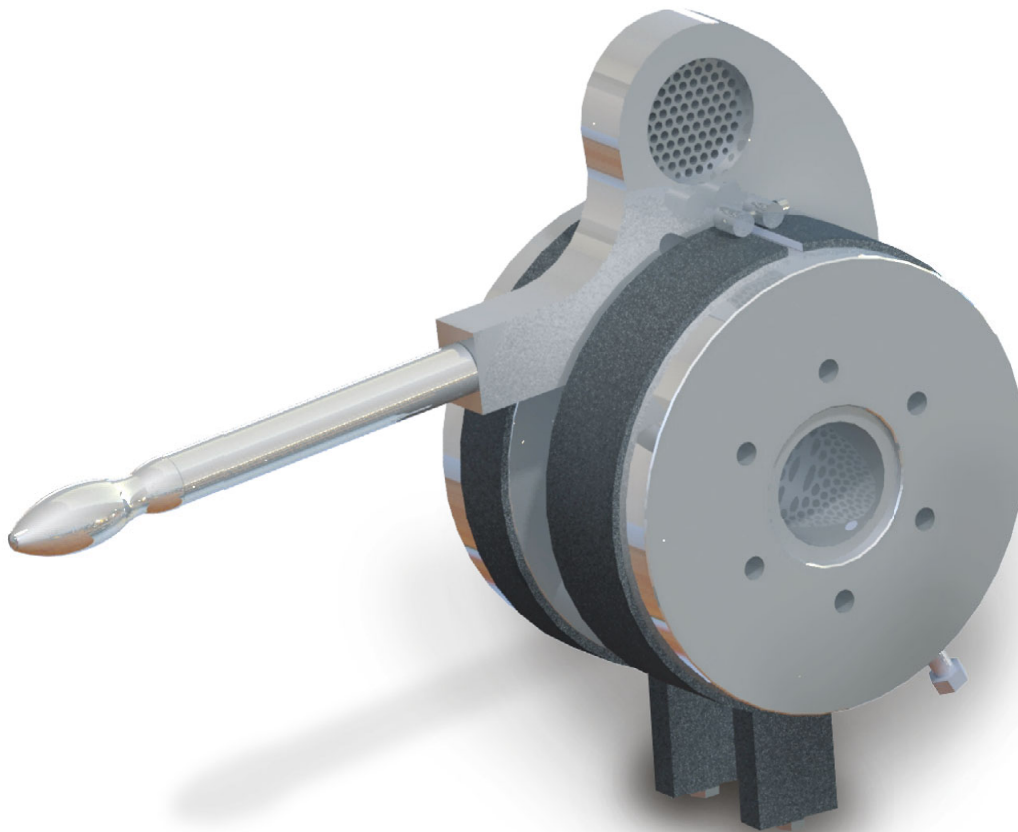

Manual screen changers from maag have been the first choice of cost-effective filtration systems in extrusion lines for many years. Starting at size 45, the manual screen changers optionally come with transmission gearing. Here, the breaker plate is equipped with patented gearing and a pinion which allows an effortless screen change even in restricted space conditions or high sealing pressures. The manual screen changer guarantees the protection of gear pumps and fine extrusion die gaps from damage and dirt accumulation.

Your benefits

- Simple operation with quick screen change
- High operational reliability
- Short material residence time
- Leak-free mode of operation
- Low pressure consumption
- Flow channel geometry without any dead spots

HSC

Manual screen changer for extrusion processes

A range of typical applications

- Flat films
- Foam films
- Blown films
- Plates (Sheet)
- Pipes
- Profiles
- Blown mouldings
- Fibres
- Granulation
- Recycling
- Compounding



Application limits:

Temperature:	Up to 340 °C
Operating pressure:	700-1,200 bar**
Pressure differential:	Up to 200 bar

** Depending on size.

Accessoires

- Connection adapter
- Base frames
- Screen plates

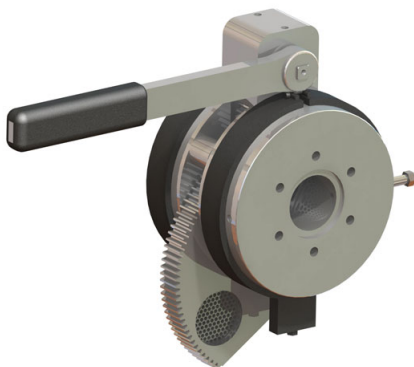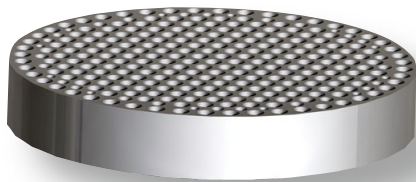

This robust and solid design of the screen changer, which consists of a few elements only, is equipped with a pressure-adaptive sealing system as standard. This sealing system adjusts the required sealing forces to the actual melt pressure automatically. Rheologically optimized flow channels and compact dimensions guarantee a short residence time of the molten material in the filter and a simple installation, even in existing extrusion lines.

One breaker plate remains in the melt flow during the operation of the line, while the second breaker plate equipped with the clean filter cloth is in stand-by position outside the housing. The line has to be stopped for a short while to accomplish the screen change procedure. Then the clean breaker plate is moved into the melt flow channel by a simple manual swivelling movement, while the contaminated breaker plate is positioned outside.

Options

- Breaker Plate with Diverter Valve function
- Integrated screw tip for PVC applications
- Chromed, nickel-plated, or specially-coated flow channels
- Stainless steel design, highly corrosion-resistant

Technical specifications:

Screen diameter:	20 to 160 mm
Filtration area:	3 cm ² to 201 cm ²
Mounting:	Compact mounting dimensions, all positions possible

Size	Throughput* [kg/h]	Screen diameter [mm]	Filter area [cm ²]
020	3-7	1 x 21	1 x 3
030	10-25	1 x 31	1 x 7
035	25-45	1 x 36	1 x 10
045	30-80	1 x 46	1 x 16
050	35-85	1 x 51	1 x 20
060	60-150	1 x 62	1 x 28
065	70-175	1 x 67	1 x 33
075	80-200	1 x 77	1 x 44
080	110-290	1 x 83	1 x 50
090	110-290	1 x 93	1 x 64
100	140-350	1 x 103	1 x 79
120	200-500	1 x 123	1 x 113
160	350-800	1 x 163	1 x 201

* Depending on viscosity, filter size, and degree of contamination.