



SPECIAL DUTY - UL Pump

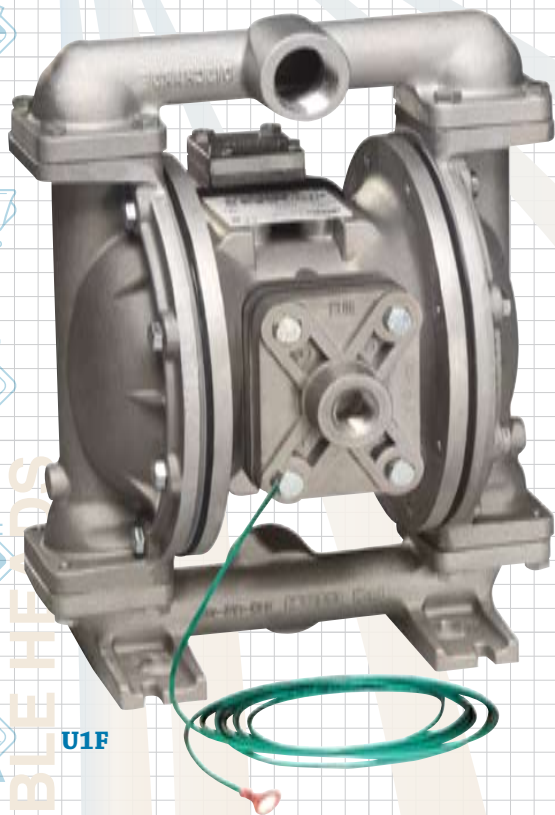

U1F Performance Curve

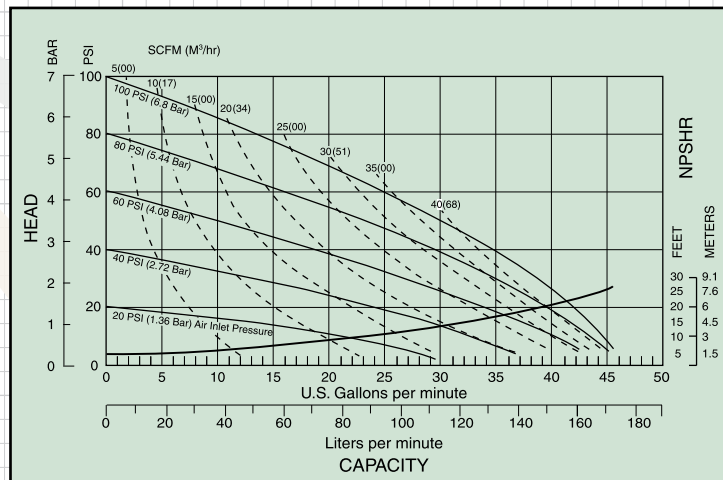


UL (Underwriters Laboratory) Pumps are designed to meet UL79 standards for diaphragm pumps handling flammable liquids. All Aluminum construction with approved Buna or Virgin PTFE UL elastomers. Fully groundable to prevent static discharge.

U1F



Underwriters
Laboratory

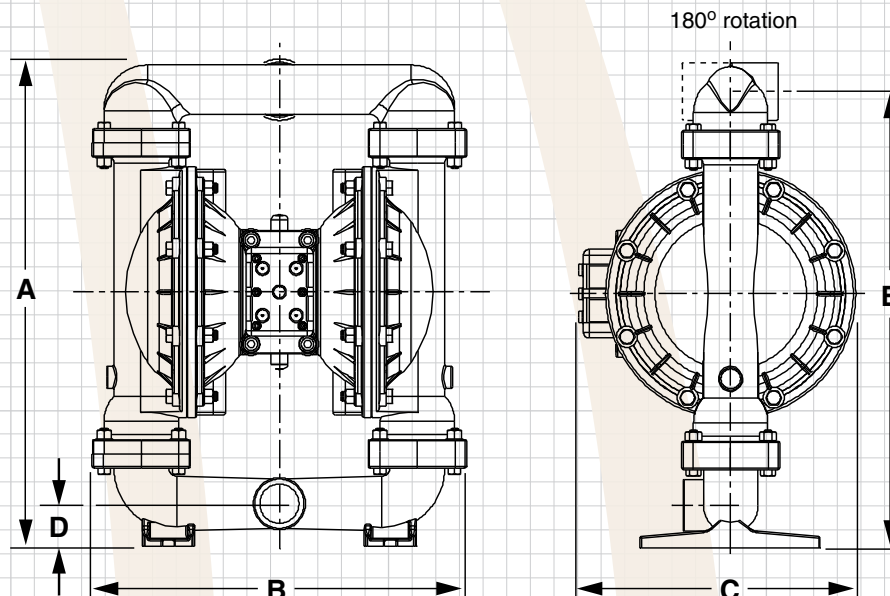

PUMP MODELS	A	B	C	D	E	Connection Style	Pipe Size	Displacement Per Stroke	Max Flow Per Minute	Max Solids Handling	Max Discharge Pressure
	Height	Width	Depth	Bottom of Base to Center Line of: Suction Discharge							
	inches (mm)	inches (mm)	inches (mm)	inches (mm)	inches (mm)						
U1F	12 23/32 (323)	10 1/4 (260)	10 3/8 (264)	1 3/32 (28)	11 27/32 (301)	1" NPT	1 (25)	.11 (.42)	45 (170)	.25 (6)	125 (8.6)

All Dimensions +/- 1/8 (3)