


EDF 3-A



TECHNICAL DATA - WELDING ENDS

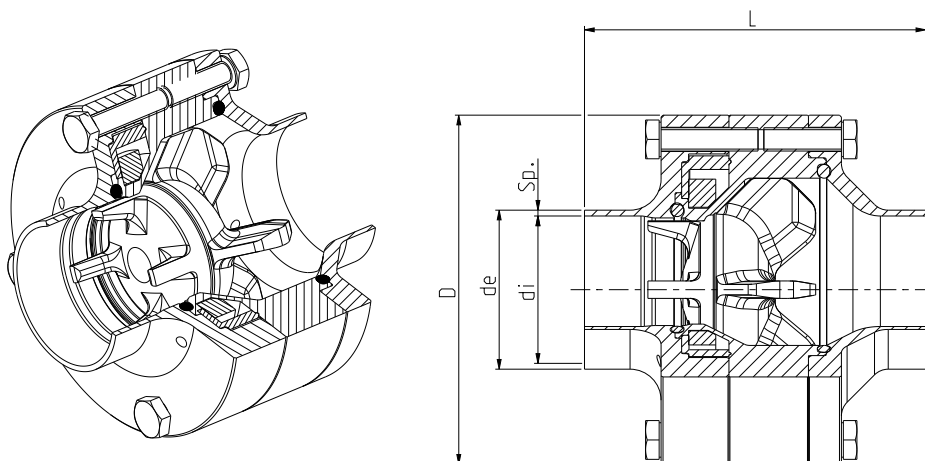


DIN 11866-A (EN 10357-A / DIN 11851) > **R**

Dimension	L (mm)	D (mm)	di (mm)	de (mm)	Sp (mm)	Weight (kg)
DN6	50	41	6	8	1	0,3
DN8	50	41	8	10	1	0,3
DN10	50	41	10	13	1,5	0,3
DN15	59	54	16	19	1,5	0,6
DN20	72	72	20	23	1,5	1,2
DN25	72	72	26	29	1,5	1,2
DN32	88	90	32	35	1,5	2
DN40	88	90	38	41	1,5	2
DN50	88	104	50	53	1,5	2,7
DN65	115,4	130	66	70	2	5,4
DN80	140	153	81	85	2	8,7
DN100	150	174	100	104	2	12
DN125	157	210	125	129	2	18,5
DN150	164,5	245	150	154	2	25
DN200	173	295	200	204	2	33,5

EDF 3-A



TECHNICAL DATA - WELDING ENDS

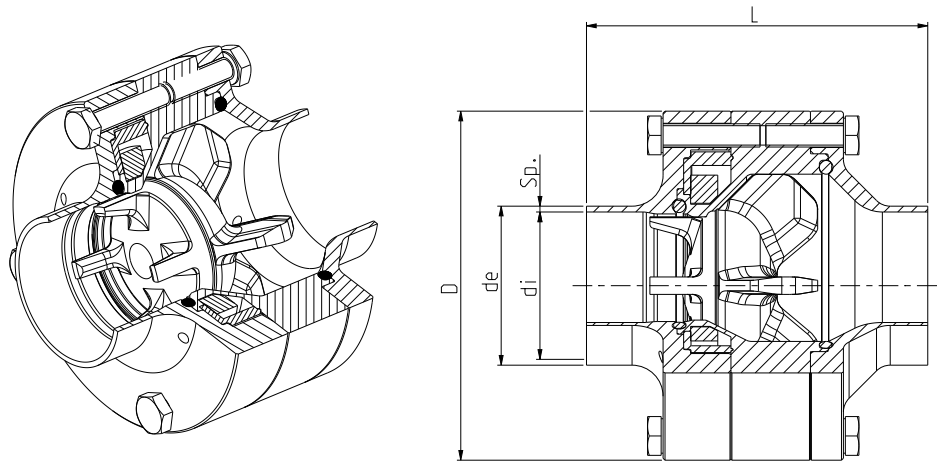



ASME BPE (DIN 11866 Reihe C) > T

Dimension	L (mm)	D (mm)	di (mm)	de (mm)	Sp (mm)	Weight (kg)
1/2"	50	41	9,4	12,7	1,65	0,3
3/4"	59	54	15,75	19,05	1,65	0,6
1"	72	72	22,1	25,4	1,65	1,2
1-1/2"	88	90	34,8	38,1	1,65	2
2"	98	104	47,5	50,8	1,65	2,6
2-1/2"	115,4	130	60,2	63,5	1,65	5,5
3"	140	153	72,9	76,2	1,65	8,8
4"	150	174	97,38	101,6	2,11	11,8
6"	169,5	245	146,86	152,4	2,77	25,5

EDF 3-A



TECHNICAL DATA - TRI-CLAMP ENDS

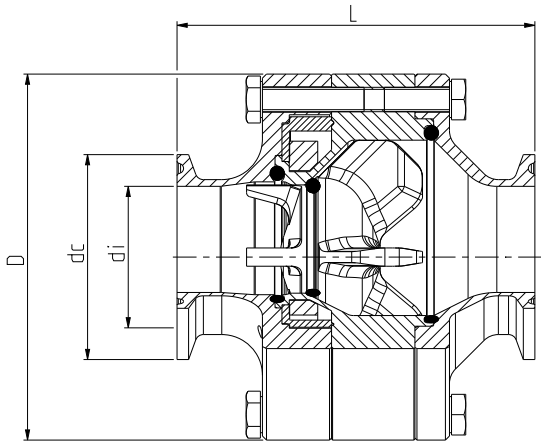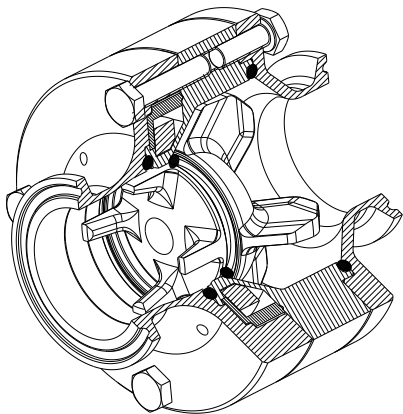

ASME BPE > C

Dimension	L (mm)	D (mm)	di (mm)	dc (mm)	Weight (kg)
1/2"	60	41	9,4	25	0,3
3/4"	69	54	15,75	25	0,6
1"	77	72	22,1	50,39	1,2
1-1/2"	88	90	34,8	50,39	2
2"	98	104	47,5	63,91	2,8
2-1/2"	117,4	130	60,2	77,39	5,5
3"	145	153	72,9	90,91	9
4"	155	174	97,4	118,92	12
6"	183,5	245	146,86	166,88	26