

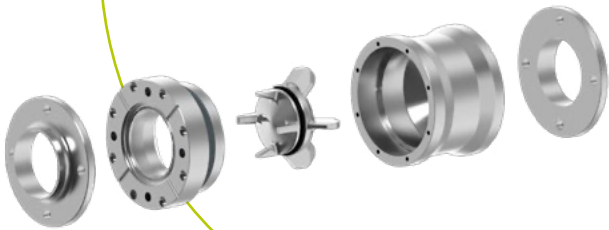


YSV

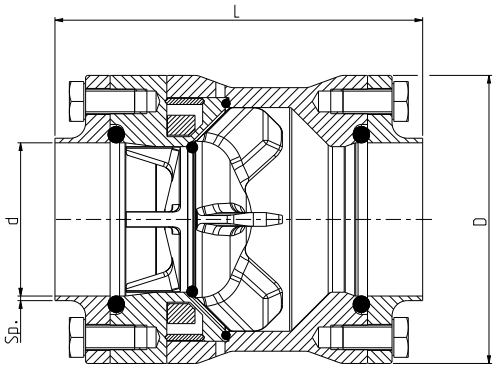


TECHNICAL DATA - WELDING ENDS

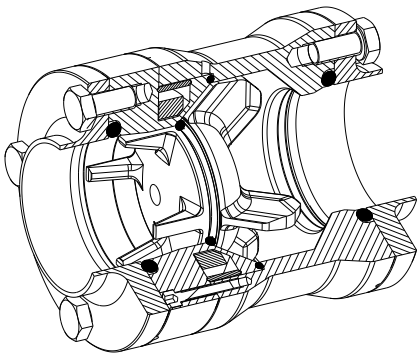



DIN 11866-A (EN 10357-A / DIN 11851) > **R**

Dimension	L (mm)	D (mm)	di (mm)	de (mm)	Sp (mm)	Weight (kg)
DN25	86,5	62	26	29	1,5	1,3
DN40	106	79,5	38	41	1,5	2,3
DN50	120	94	50	53	1,5	3,3
DN65	130	116	66	70	2	5,3
DN80	153,5	134,5	81	85	2	7,8
DN100	163	155	100	104	2	10,1
DN125	184,5	199	125	129	2	18,8

YSV

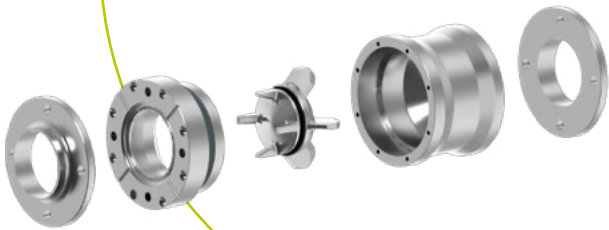


TECHNICAL DATA - WELDING ENDS

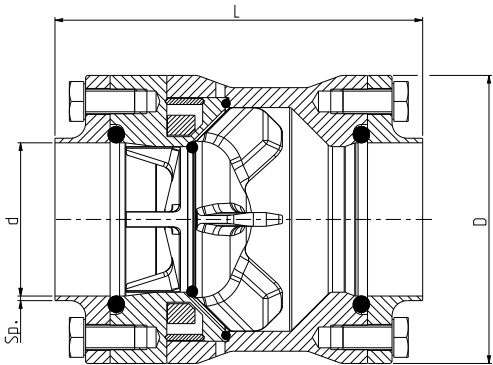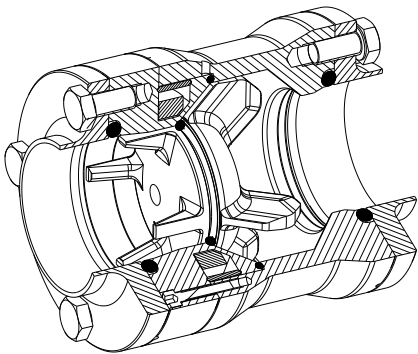



ASME BPE (DIN 11866 Reihe C) > T

Dimension	L (mm)	D (mm)	di (mm)	de (mm)	Sp (mm)	Weight (kg)
1"	86,5	62	22,1	25,4	1,65	1,3
1-1/2"	106	79,5	34,8	38,1	1,65	2,3
2"	120	94	47,5	50,8	1,65	3,3
2-1/2"	130	116	60,2	63,5	1,65	5,3
3"	153,5	134,5	72,9	76,2	1,65	7,8
4"	163	155	97,38	101,6	2,11	10,1
5"	184,5	199	121,46	127	2,77	18,8

YSV

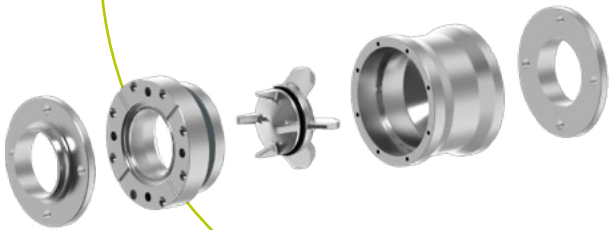

TECHNICAL DATA - WELDING ENDS

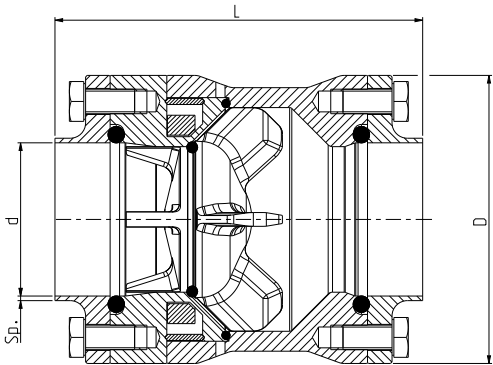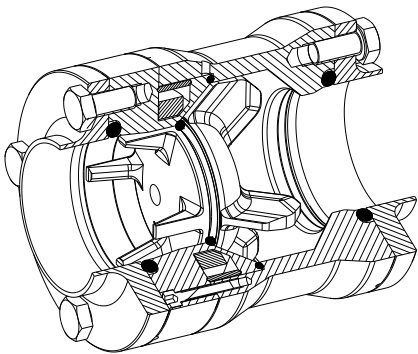

SMS (EN 10357 series D) > N

Dimension	L (mm)	D (mm)	di (mm)	de (mm)	Sp (mm)	Weight (kg)
DN25	86,5	62	22,6	25	1,2	1,3
DN38	106	79,5	35,6	38	1,2	2,3
DN51	120	94	48,6	51	1,2	3,3
DN63,5	130	116	60,2	63,4	1,6	5,3
DN76,1	153,5	134,5	72,9	76,1	1,6	7,8
DN101,6	163	155	97,38	101,6	2,11	10,1