



QALCOSONIC W1

← DN15, DN20, DN25, DN32, DN40, DN50



WWW



ISO 4064-1-2017




M1
2014/32/UE



E1 / E2
ISO 4064:2014
2014/32/EU



UO DO

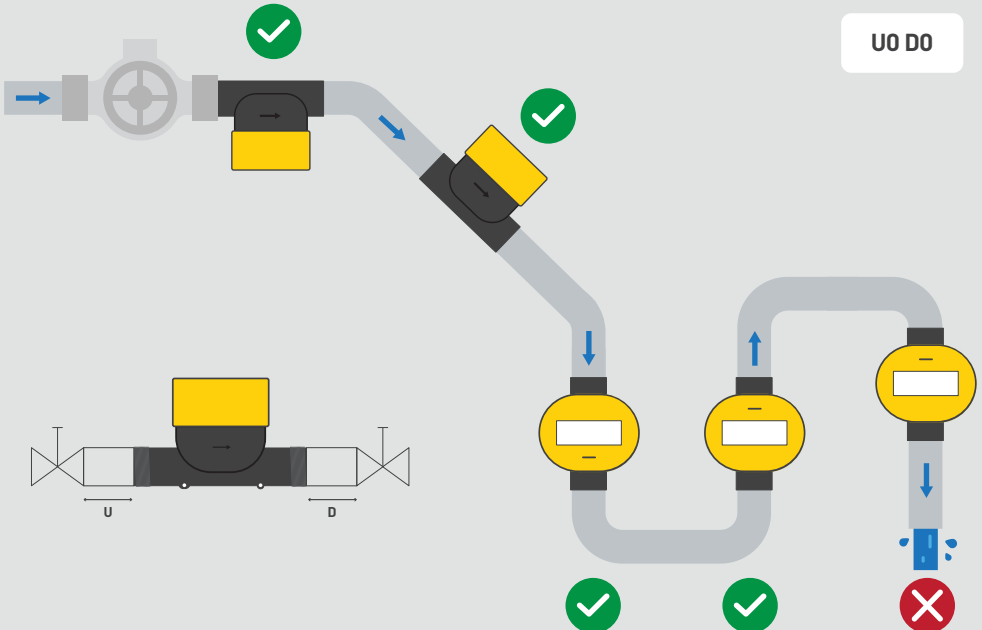


T30 max 30°C
T90 max 90°C
(33 F ... 194 F)


Max 16 bar
(Max 260 psi)

-15°C...+70°C
-59 F...+158 F

UV

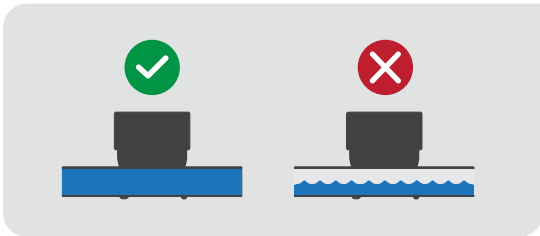

DN15	DN20	DN25	DN32	DN40
27 mm	31 mm	41 mm	49 mm	55 mm
30 Nm	35 Nm	40 Nm	40 Nm	40 Nm

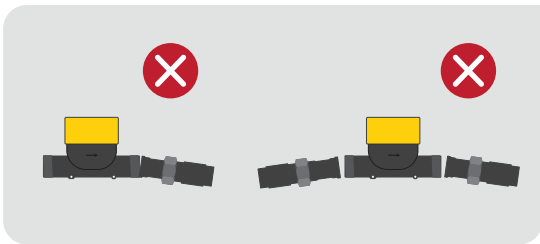

DN 50	
Pass	Torque, Nm
1	10
2	25
3	35-40

Max torque 40Nm.

4 BOLT

