

# Rannie 5 / Gaulin 5

## Introduction

The Rannie 5 / Gaulin 5 homogeniser, a positive displacement triplex, reciprocating plunger pump, is fitted with an application-specific homogenising valve assembly: single-stage with manual actuation. As a high-pressure pump the Rannie 5 is fitted with a relief valve. For Gaulin 5 the relief valve is available as an option.

The Rannie 5 / Gaulin 5 homogeniser incorporates a durable slow-speed power end that reduces vibration and noise. Easy access to the lubrication oil and other auxiliary systems simplifies maintenance saving time and money. Liquid end options include a three-piece valve housing (Rannie) and a mono-block design (Gaulin) (ball and poppet style).

Design features of both the Rannie and Gaulin simplify routine maintenance. Materials for plungers, packings, pump valves, valve seats and seals are custom-selected for your application. APV engineers will work with you to optimise the configuration for your specific application.



### STANDARD OPTIONS

- Two-stage manual
- Single-stage hydraulic valve actuation (HVA)
- Two-stage hydraulic valve actuation (HVA)
- Single-stage automatic hydraulic system (AHS)
- Two-stage automatic hydraulic system (AHS)
- Aseptic cylinder design
- Electronic pressure transmitter excl. display
- High-pressure outlet
- Inlet pressure gauge
- Plunger lubrication control package
- Tungsten carbide homogenising valve
- Square plunger seals and ceramic plungers (Rannie valve housing only)
- External cooling fan/main motor
- Motor starter

### SPECIAL OPTIONS

- Acid-proof cylinder (Gaulin valve housing only)
- Ceramic plungers with U- or V-rings \*
- Explosion-proof design
- Electropolished wettables
- High-temperature design
- For pressures above 600 bar the plungers and the type of homogenising valve may change.




RANNIE THREE-PIECE  
VALVE HOUSING



GAULIN MONO-BLOCK  
DESIGN


**RANNIE/THREE-PIECE VALVE HOUSING  
POPPET AND BALL TYPE VALVES**

TYPE	U.S. MAX. CAP./MAX. PRESS.		METRIC MAX.CAP./MAX. PRESS	
	GPH	PSI	LPH	BAR
25.38	240	2900	900	200
22.38	185	3625	700	250
20.38	150	4300	570	300
18.38	120	5800	450	400
14.38	65	8700	250	600
12.38	34	11600	130	800
10.38	21	14500	80	1000

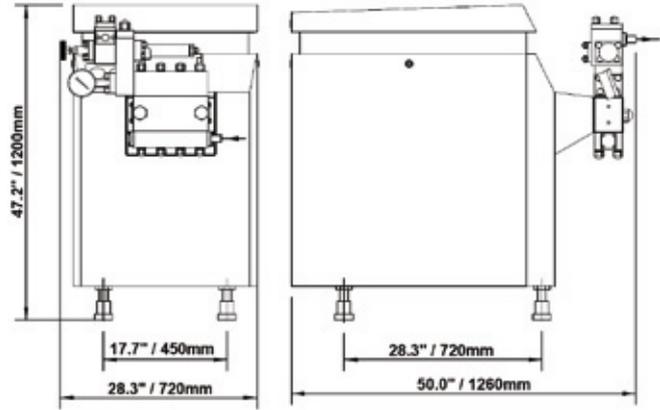

**GAULIN/MONO-BLOCK DESIGN**

TYPE	U.S. MAX. CAP./MAX. PRESS.		METRIC MAX.CAP./MAX. PRESS	
	GPH	PSI	LPH	BAR
<b>POPPET TYPE VALVES</b>				
3.0	225	3000	850	210
<b>BALL TYPE VALVES</b>				
3.0	190	3000	720	210
4.3	130	4300	500	300
5.8	105	5800	400	400
8.7	50	8700	180	600

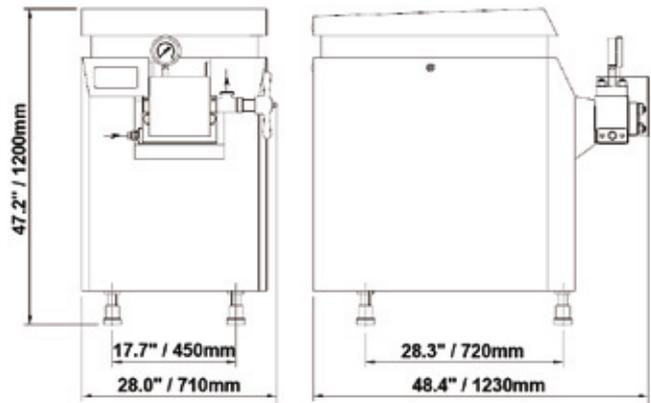

**DIMENSIONS (SINGLE STAGE)**

DIMENSIONS PACKED IN A CRATE LXWXH (IN.)	DIMENSIONS PACKED IN A CRATE LXWXH (CM)	CUBIC MEASURE M3	GROSS WEIGHT IN A CRATE INCL. MOTOR
51 X 34 X 59	130 X 85 X 150	1.6	1,543 LB./700 KG

