



Boyser lobe pumps LB-S/90

Industrial pumps and fluid-handling equipment

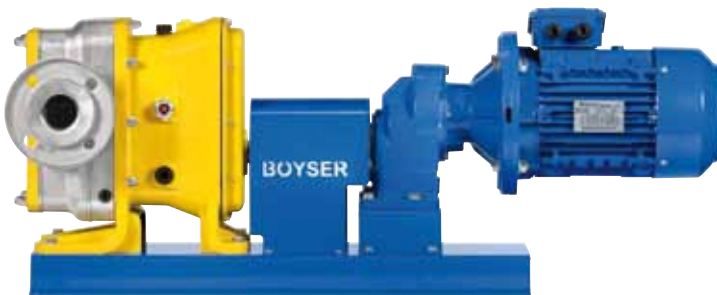

Performance table

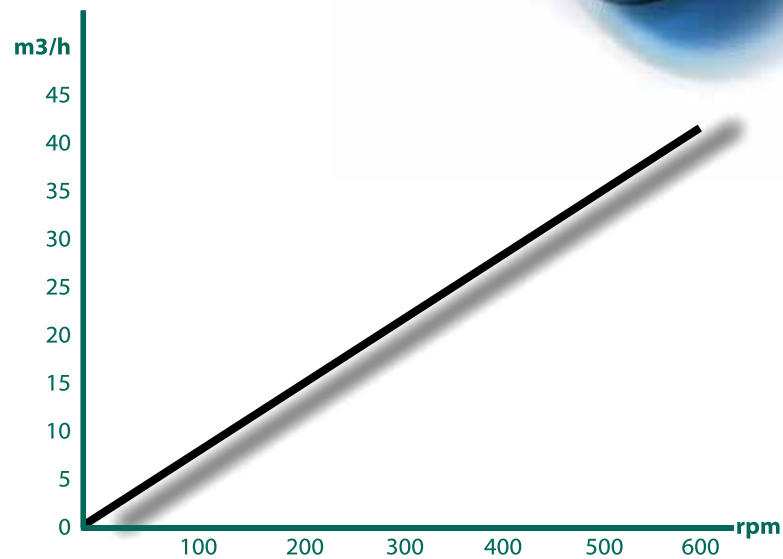

Technical data LB-S/90

| | |
|-------------------------------------|--------------------------------------------------------------------|
| Capacity | 1,17 l/rev |
| Operating pressure | <6 bar |
| Rubber coated rotors: | NBR, EPDM, FKM |
| Metallic rotors available: | AISI-316 , AISI-420 |
| Pump-body material: | AISI-316, AISI-410 |
| Mechanical seals: | Carb. Silicon / Carb. Tungsten, Graphite/Carb. Tungsten. |
| Standard connections | DIN DN-65 or DN-80 flanges. |
| Other connections available: | DIN 11851 NW, Tri-clamp, SMS, Fast adapters, ANSI flanges, etc. |

