



PLATE HEAT EXCHANGERS MANUFACTURING



HEATING



COOLING



SANITARY WATER

EURO HEAT is in business of manufacturing plate heat exchangers since 1995. We are producing gasket and brazed plate heat exchangers with capacities up to 20 MW, as well as plate and shell type of heat exchangers with capacities up to 100 MW.

Up to date production with strictly defined technological process, usage of top quality materials, constant development, rigorous finish control. All this helped EURO HEAT to become leader in manufacturing plate heat exchangers in southeast Europe.

Company is certified with ISO 9001 , ISO 14001 , ISO 18001 , GostR and CE certificates for its products.

Up until now EURO HEAT has more then 20.000 heat exchangers installed and working all around the world.

Regarding heating, cooling and all other applications EURO HEAT provides help and support to its clients by software solutions that are regularly updated on our web page.

PLATE & SHELL HEAT EXCHANGERS

This type of heat exchangers represents ideal combination of plate heat exchanger and shell&tube heat exchangers, combining the best features of both - efficiency of plate heat exchanger and safety shell&tube heat exchangers.


The inner plate are welded together so, by eliminating gaskets this type of heat exchanger can work with temperatures from $-200\text{ }^{\circ}\text{C}$ up to $500\text{ }^{\circ}\text{C}$. These heat exchangers are manufactured in capacities up to 100.000 kW and working pressures up to 100 bar, efficiency of these type of heat exchanger is very high (95%).

This type of heat exchangers is used in district heating systems (most often as primary heat exchanger), as condensers and evaporators. Plate&shell heat exchangers have also found their place in applications within systems for heating and cooling oil.

More and more, this type of heat exchanger is used in function of economizers and recuperators for waste heat gases.

This type of exchanger is ideal for systems where there are large and asymmetric flows of working fluids.

Another advantage of this type of heat exchanger is that it is possible to clean one side of exchanger very easy, therefore this type of exchanger is often used as a primary heat exchanger in systems of large boiler plants which serve to protect the boiler from impurities that can reach boiler from the pipelines.

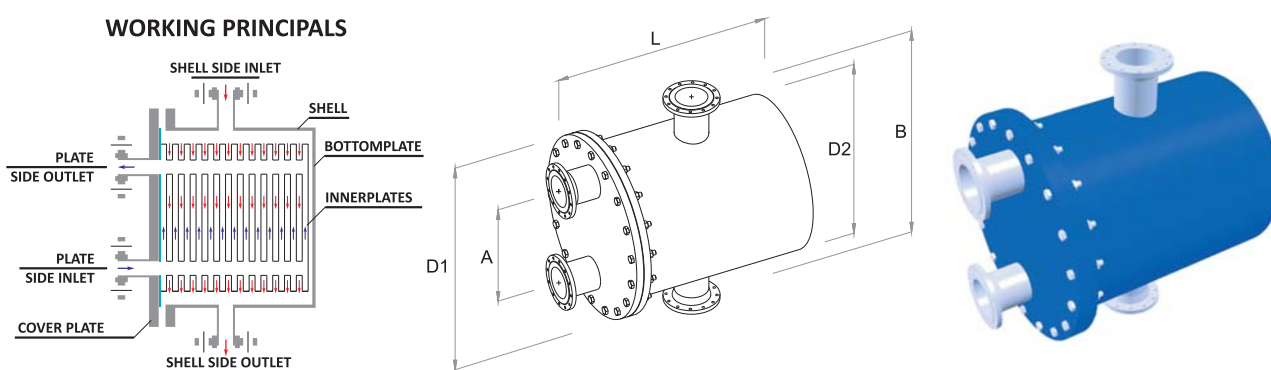


BASIC INFORMATION ABOUT PLATE&SHELL HEAT EXCHANGERS

| Type | Inner plate demeter [mm] | Thickness of inner plates [mm] | Area per plate [m ²] | Maximal number of inner plates | D1 (mm) | A (mm) | D2 (mm) | B (mm) | L (mm) | Plate side connection [DN] | Shell side connection [DN] |
|--------|--------------------------|--------------------------------|----------------------------------|--------------------------------|---------|--------|---------|----------|----------|----------------------------|----------------------------|
| P 100 | 120 | 0.6 | 0.01 | 100 | 202 | 80 | 139.7 | variably | variably | 25 | 25 - 50 |
| P 200 | 190 | 0.6 | 0.027 | 150 | 289 | 130 | 219.1 | | | 25 | 25 - 80 |
| P 350 | 320 | 0.6 | 0.082 | 300 | 450 | 226 | 355.6 | | | 50 | 25 - 150 |
| P 500 | 454 | 0.6 | 0.165 | 500 | 665 | 330 | 508 | | | 80 | 50 - 300 |
| P 660 | 660 | 0.7 | 0.369 | 600 | 885 | 498 | 711 | | | 125 | 50 - 500 |
| P 1000 | 940 | 0.7 | 0.717 | 1000 | 1290 | 740 | 1060 | | | 200 | 50 - 700 |

PLATE & SHELL HEAT EXCHANGERS


SCHEME IN THE AREAS OF APPLICATION

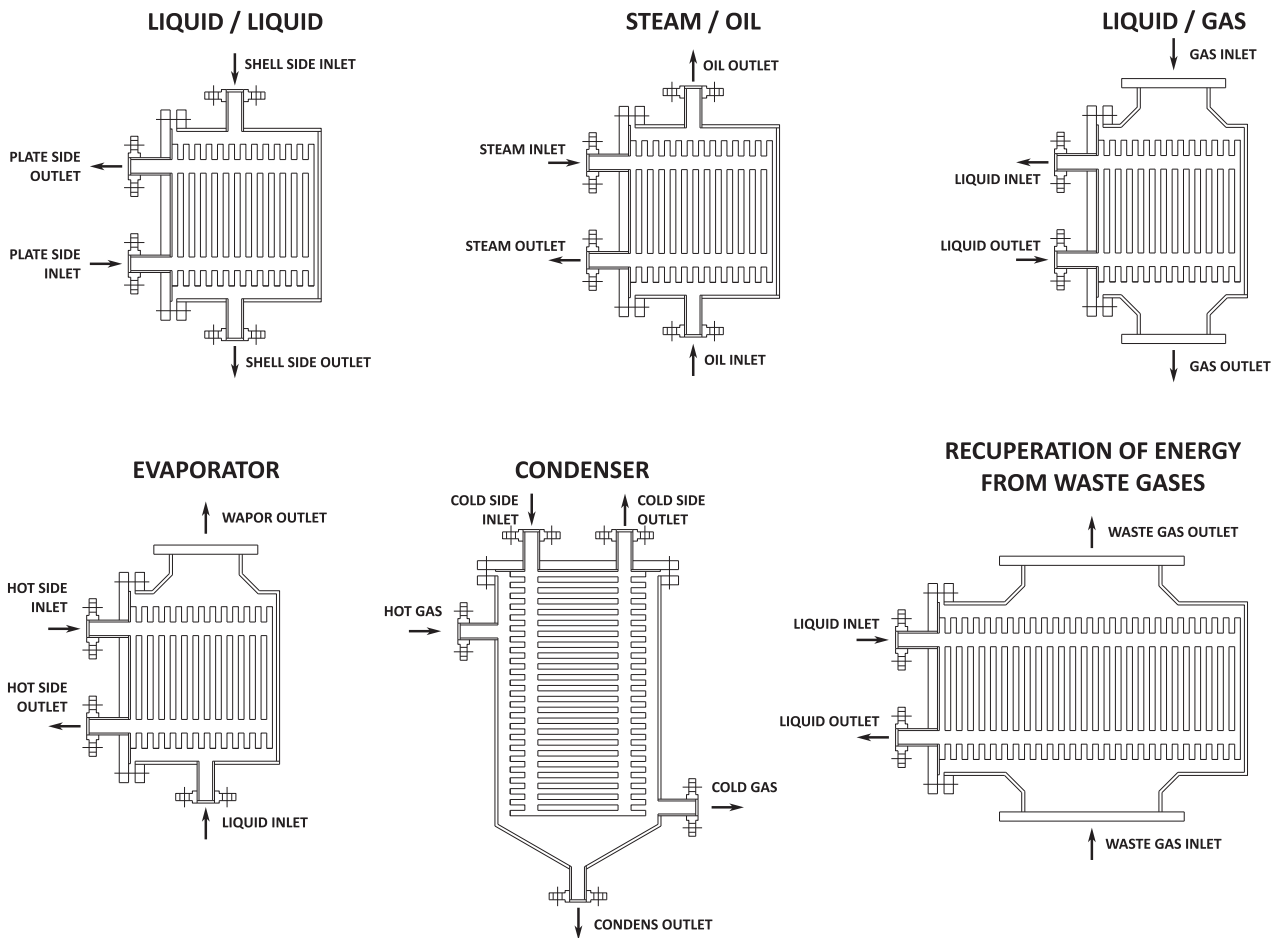

COMPARISON OF TYPES OF HEAT EXCHANGER

TYPES OF HEAT EXCHANGER

| | | Shell and tube | Plate spiral | Gasket plate | Brazed plate | Plate & shell |
|-----------------------------|----------------------|--|--|-----------------------------------|---------------------------------|--|
| Weight | kg | 1000 | 800 | 500 | 300 | 400 |
| Volume | m ³ | 1.0 | 0.7 | 0.4 | 0.2 | 0.2 |
| Application areas | / | liquid / liquid gas / liquid gas / gas | liquid / liquid gas / liquid gas / gas | liquid / liquid vapor / liquid | liquid / liquid gas / liquid | liquid / liquid gas / liquid gas / gas |
| Maximum working temperature | °C | 300 | 300 | -10/150 | -40/220 | -196/400 |
| Maximum working pressures | bar | ~200 | ~ 16 | ~ 25 | ~ 40 | ~100 |
| K coefficient | W/m ² h°C | 200 - 1500 | 600 - 2500 | max 6000 | max 6000 | max 6000 |
| Efficiency plates | % | / | 100 | 75 | 80 | 100 |
| Maintenance costs | 100% | 100 | 60 | 60 | inseparable | 40 |

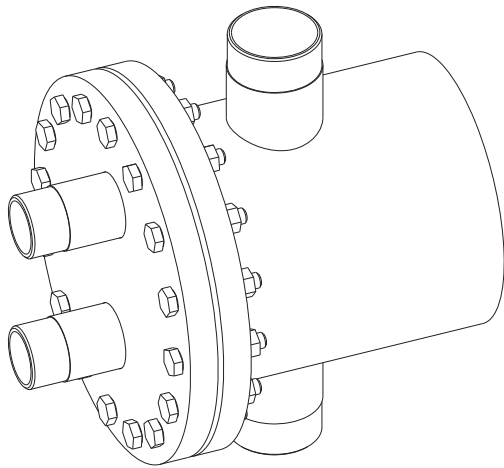



MATERIALS

SHELL AND CONNECTIONS

S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
 AISI 304 (X5CrNi8 -10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

INNER PLATES


AISI 304 (X5CrNi8-10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

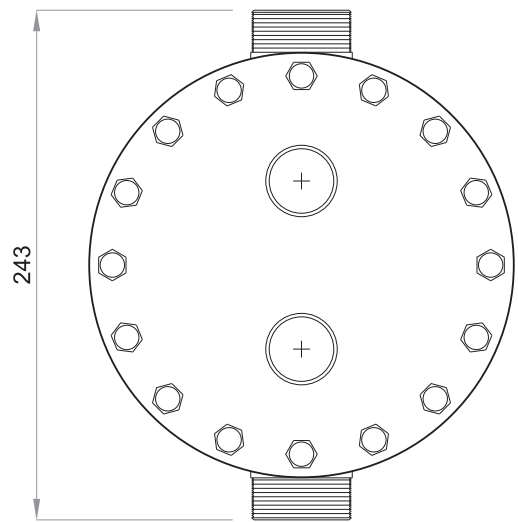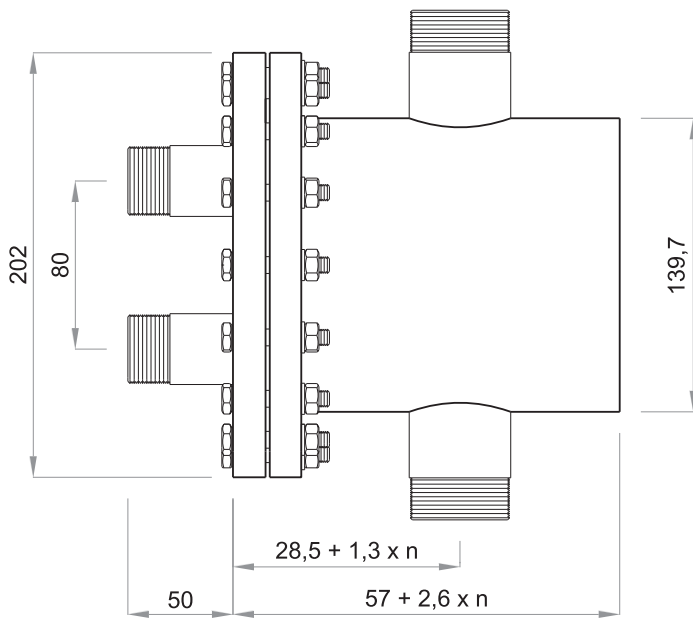

n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER – type P 100

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 25 |
| SHELL SIDE CONNECTION | DN 25 ÷ DN 50 |
| DIMENSIONS – H x W x L [mm] | 243 x 200 x 103 + 2.6 x n |
| HEAT TRANSFER AREA [m ²] | 0.011 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.023 / 0.11 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 10.2 + 0.082 x n |
| THICKNESS OF INNER PLATES [mm] | 0.6 |
| MAXIMAL NUMBER OF INNER PLATES | 200 |
| MAXIMAL FLOW [m ³ /h] | 8 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

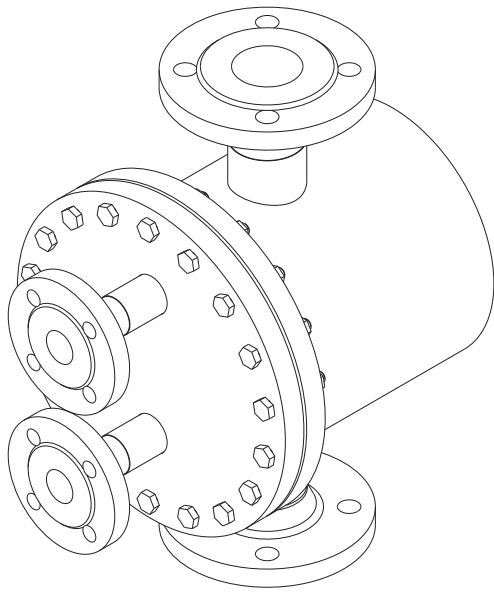


MATERIALS

SHELL AND CONNECTIONS

- S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
- AISI 304 (X5CrNi8 -10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

INNER PLATES


- AISI 304 (X5CrNi8-10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

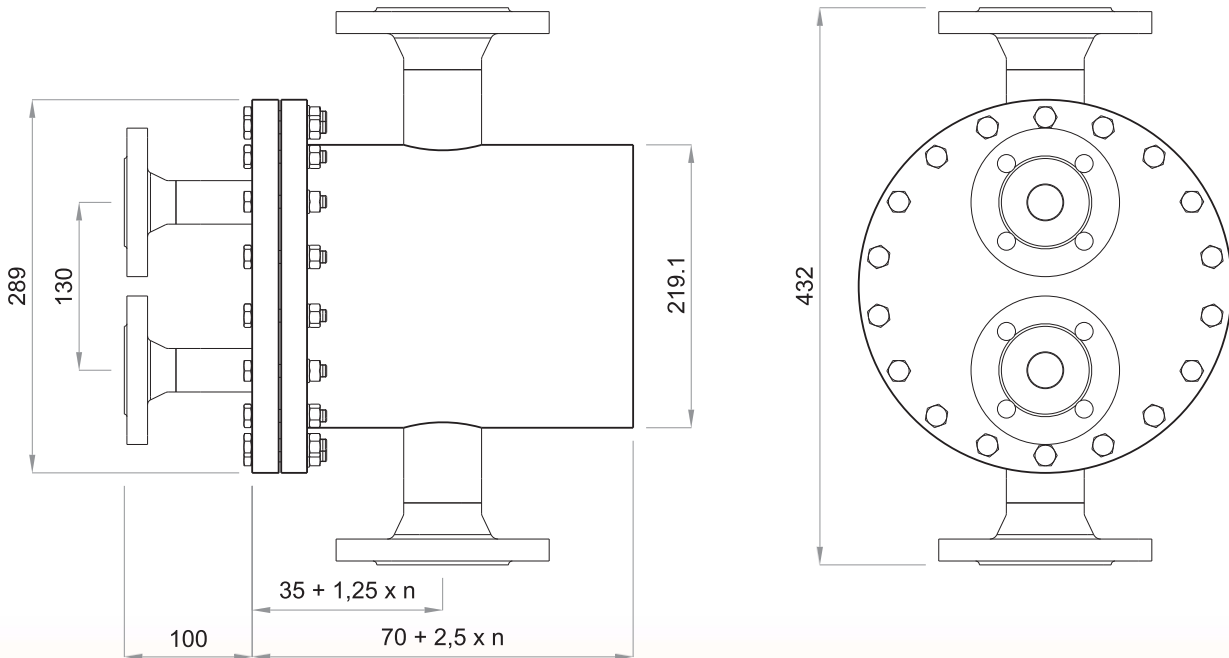

n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER – type P 200

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 25 |
| SHELL SIDE CONNECTION | DN 25 ÷ DN 80 |
| DIMENSIONS – H x W x L [mm] | 325 x 290 x 123 + 2.5 x n |
| HEAT TRANSFER AREA [m ²] | 0.028 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.036 / 0.173 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 35.8 + 0.01 x n |
| THICKNESS OF INNER PLATES [mm] | 0.5 |
| MAXIMAL NUMBER OF INNER PLATES | 200 |
| MAXIMAL FLOW [m ³ /h] | 12 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

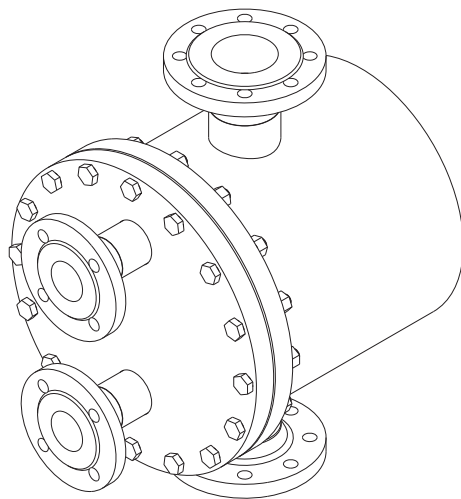



MATERIALS

SHELL AND CONNECTIONS

S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
 AISI 304 (X5CrNi8 -10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

INNER PLATES

AISI 304 (X5CrNi8-10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

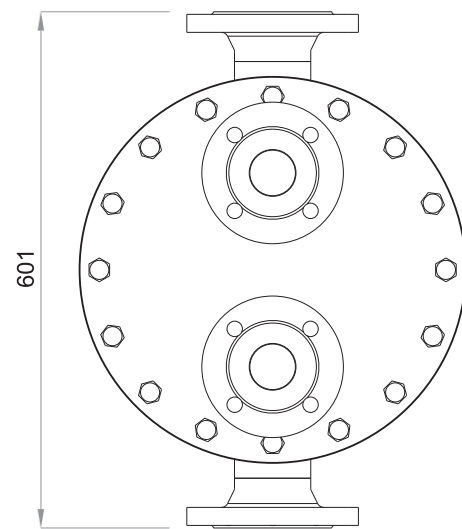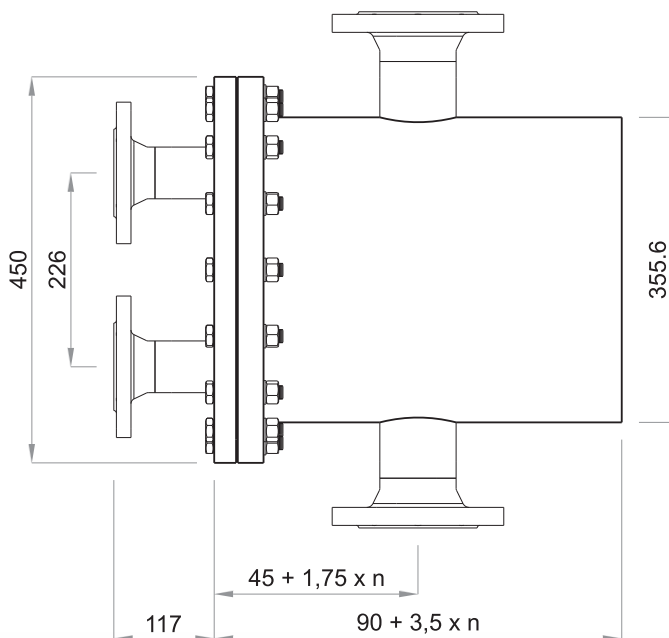


n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER – type P 350

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 50 |
| SHELL SIDE CONNECTION | DN 25 ÷ DN 150 |
| DIMENSIONS – H x W x L [mm] | 488 x 425 x 153 + 3.5 x n |
| HEAT TRANSFER AREA [m ²] | 0.079 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.06 / 0.29 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 105 + 0.595 x n |
| THICKNESS OF INNER PLATES [mm] | 0.5 |
| MAXIMAL NUMBER OF INNER PLATES | 300 |
| MAXIMAL FLOW [m ³ /h] | 40 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

Material codes: EN 10088-2, ASTM, GOST

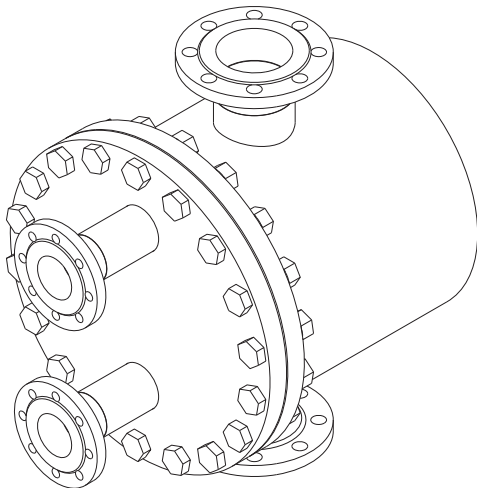


MATERIALS

SHELL AND CONNECTIONS

- S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
- AISI 304 (X5CrNi8 -10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

INNER PLATES

- AISI 304 (X5CrNi8-10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

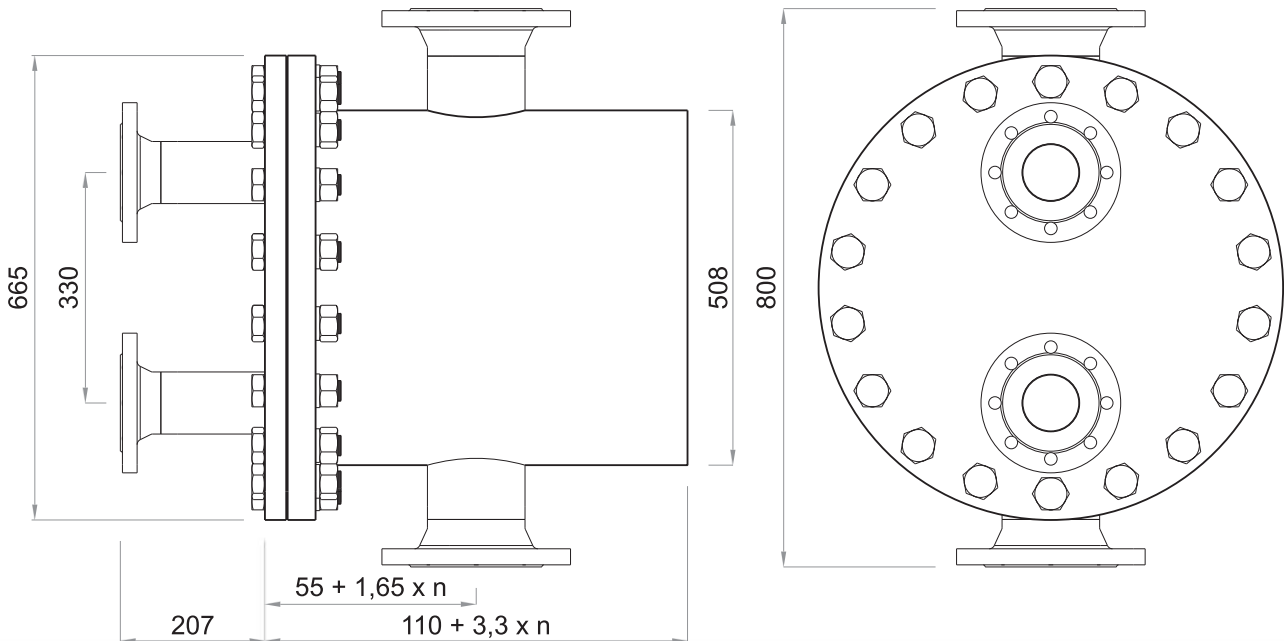


n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER – type P 500

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 80 |
| SHELL SIDE CONNECTION | DN 50 ÷ DN 300 |
| DIMENSIONS – H x W x L [mm] | 665 x 628 x 253 + 3.3 x n |
| HEAT TRANSFER AREA [m ²] | 0.166 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.08 / 0.41 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 0.5 |
| THICKNESS OF INNER PLATES [mm] | 278 + 1.16 x n |
| MAXIMAL NUMBER OF INNER PLATES | 500 |
| MAXIMAL FLOW [m ³ /h] | 120 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

Material codes: EN 10088-2, ASTM, GOST

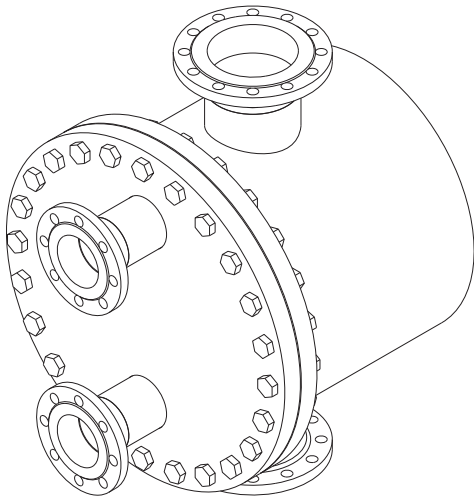



MATERIALS

SHELL AND CONNECTIONS

S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
 AISI 304 (X5CrNi8 -10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

INNER PLATES


AISI 304 (X5CrNi8-10, 1.4301, 08Ch18N10)
 AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Ch17N13M3)
 AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Ch17N14M3)

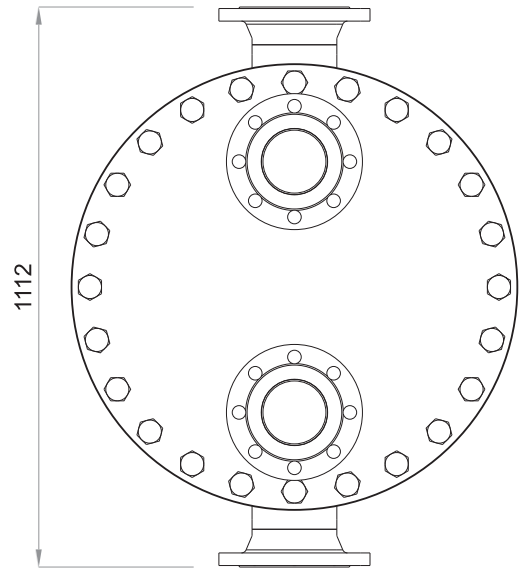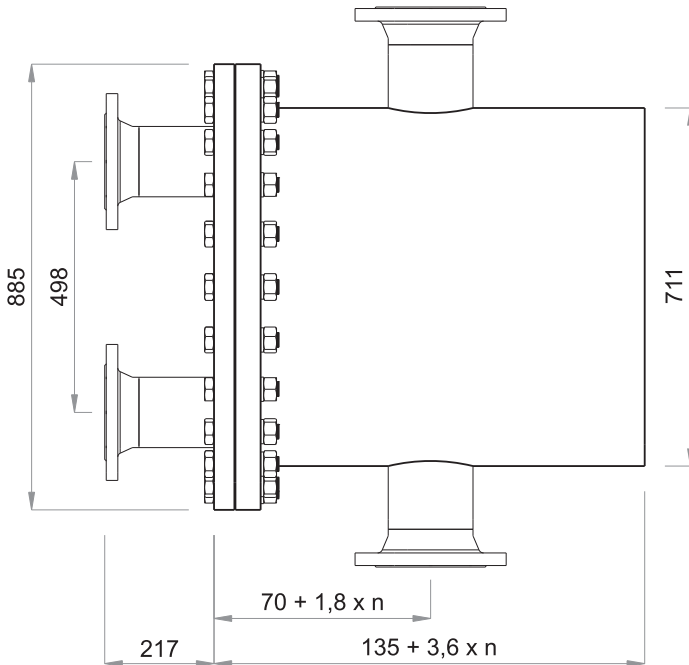

n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER - type P 660

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 125 |
| SHELL SIDE CONNECTION | DN 50 ÷ DN 500 |
| DIMENSIONS – H x W x L [mm] | 950 x 891 x 273 + 3.6 x n |
| HEAT TRANSFER AREA [m ²] | 0.369 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.12 / 0.59 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 598 + 2.3 x n |
| THICKNESS OF INNER PLATES [mm] | 0.5 |
| MAXIMAL NUMBER OF INNER PLATES | 600 |
| MAXIMAL FLOW [m ³ /h] | 250 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

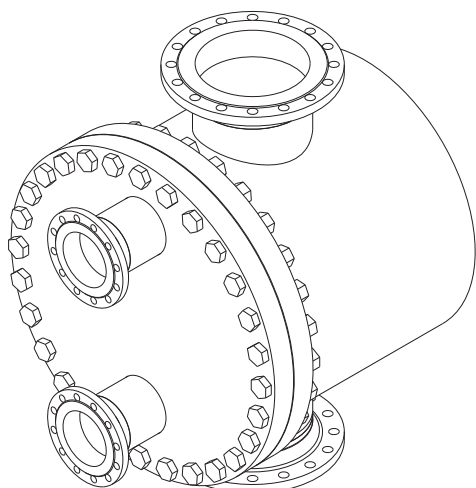


MATERIALS

SHELL AND CONNECTIONS

- S235JRG2 (1.0038 , Gr.36 , Cr3nc) - COATED
- AISI 304 (X5CrNi8 -10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

INNER PLATES

- AISI 304 (X5CrNi8-10, 1.4301, 08Chl8N10)
- AISI 316 (X5CrNiMo 17-12-2, 1.4401, 03Chl7N13M3)
- AISI 316L (X2CrNiMo 18-14-3, 1.4435, 03Chl7N14M3)

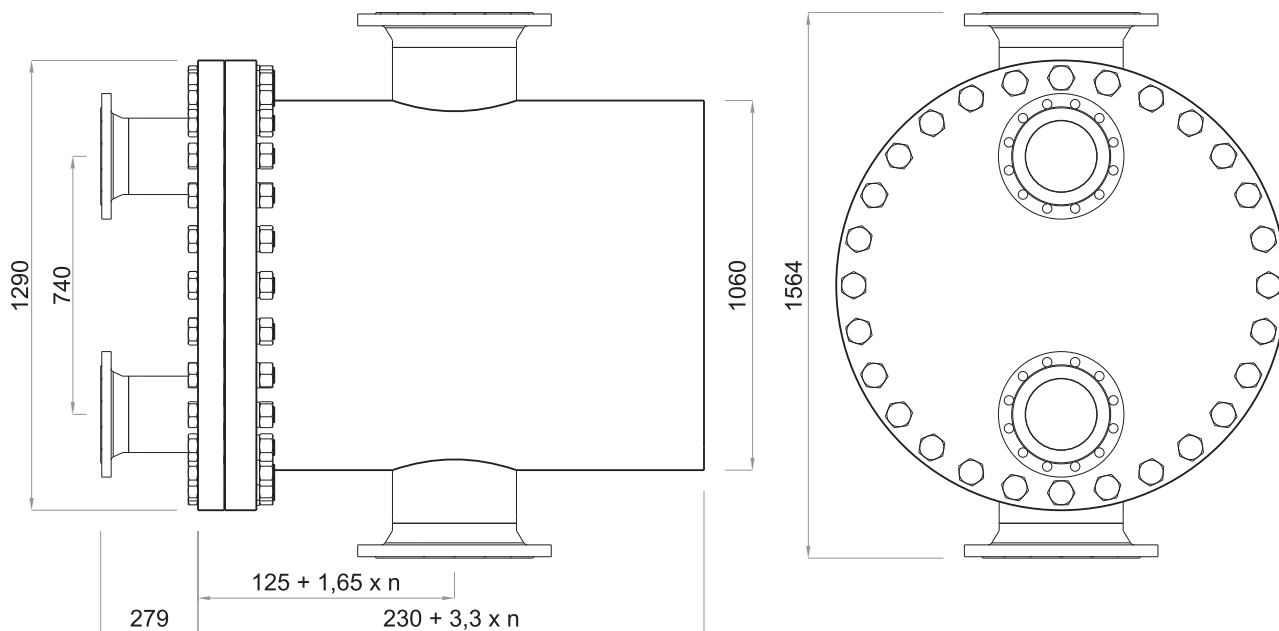


n - number of inner plates

BASIC INFORMATION ABOUT HEAT EXCHANGER – type P 1000

| | |
|--------------------------------------|---------------------------------|
| PLATE SIDE CONNECTION | DN 200 |
| SHELL SIDE CONNECTION | DN 50 ÷ DN 700 |
| DIMENSIONS – H x W x L [mm] | 1564 x 1060 x 403 + 3.3 x n |
| HEAT TRANSFER AREA [m ²] | 0.73 x n |
| VOLUME OF PLATE / SHELL SIDE [l] | 0.17 / 0.83 x channels |
| WEIGHT OF HEAT EXCHANGER [kg] | 2220 + 4.51 x n |
| THICKNESS OF INNER PLATES [mm] | 0.5 |
| MAXIMAL NUMBER OF INNER PLATES | 700 |
| MAXIMAL FLOW [m ³ /h] | 700 |
| MAXIMAL WORKING TEMPERATURE [°C] | + 400 |
| MINIMAL WORKING TEMPERATURE [°C] | - 200 |
| WORKING PRESSURES | NP6 , NP16 , NP25 , NP32 , NP40 |
| TEST PRESSURE [bar] | 60 |

WASTE GAS ECONOMIZER

According to the most modern global trends in terms of ecology and energy saving EURO HEAT has developed a special category smokestack heat exchanger which are used as heat economizers, and recuperates heat from waste gases.

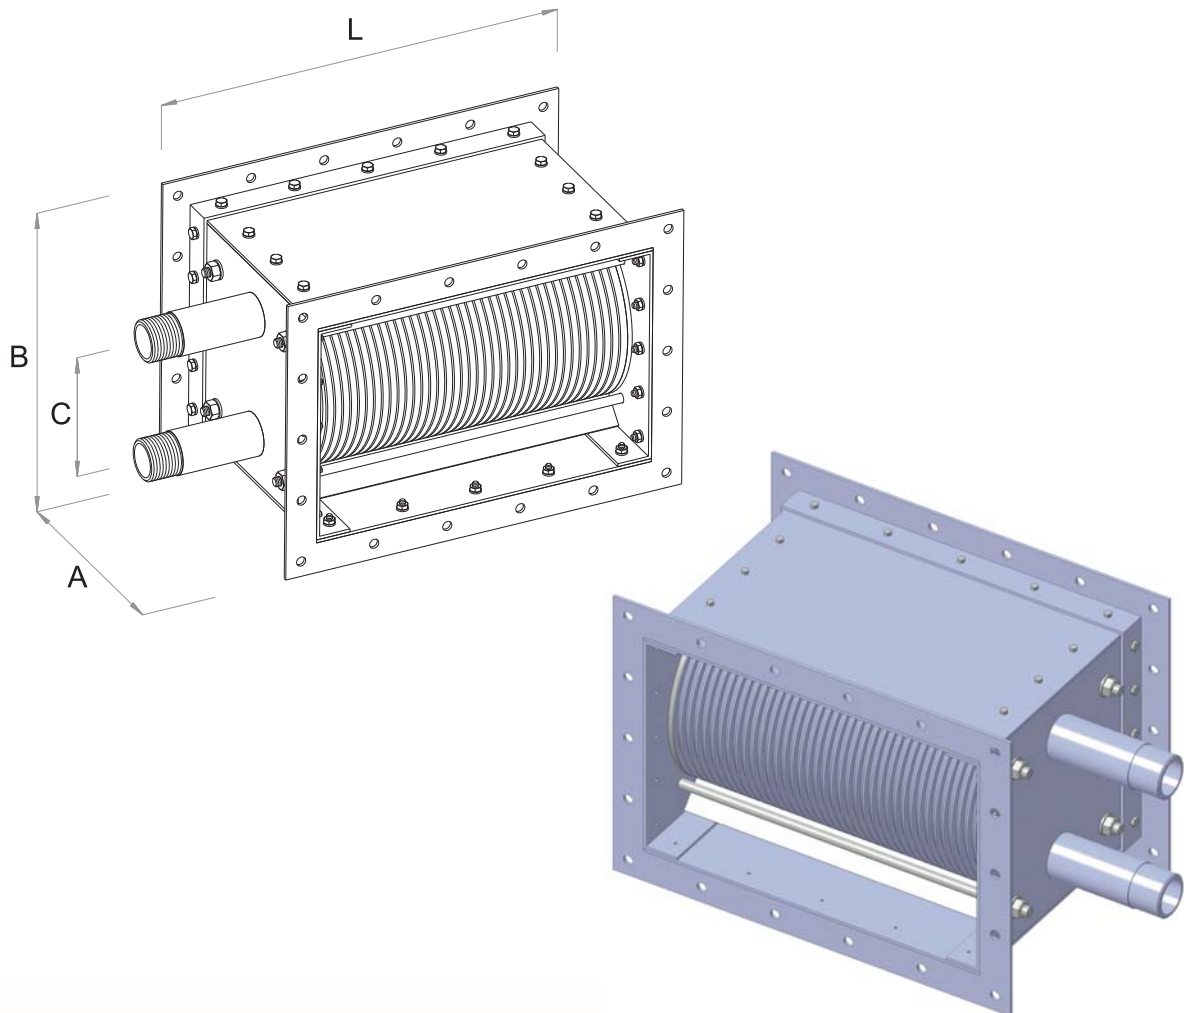

| WASTE GAS ECONOMIZER | | | | |
|----------------------|--------|--------|--------|---------|
| TYPE | A [mm] | B [mm] | C [mm] | L [mm] |
| P 100 | 230 | 230 | 80 | 2.6 x n |
| P 200 | 315 | 315 | 130 | 2.5 x n |
| P 350 | 500 | 500 | 226 | 3.5 x n |
| P 500 | 700 | 700 | 330 | 3.6 x n |
| P 660 | 950 | 950 | 498 | 3.6 x n |
| P 1000 | 1300 | 1300 | 740 | 3.3 x n |

n - number of inner plates

HEATING SUB STATIONS

EURO HEAT SUB is a complete system for district heating systems ready for installation in the space within the building for a very short time.

EURO HEAT SUB substations are designed for heating systems and preparation of sanitary hot water in residential and commercial buildings.


EURO HEAT SUB substations are fully automated and have the ability to control all heating circuits according to manually set temperatures or depending on outside temperature.

All EURO HEAT SUB substations are made of the highest quality, certified and proven components.

Rigorous control of finished products is confirmed through obtaining the CE mark as well as GostR certificate of the Russian Federation on which EURO HEAT exports its products for many years.



SOFTWARE SOLUTIONS

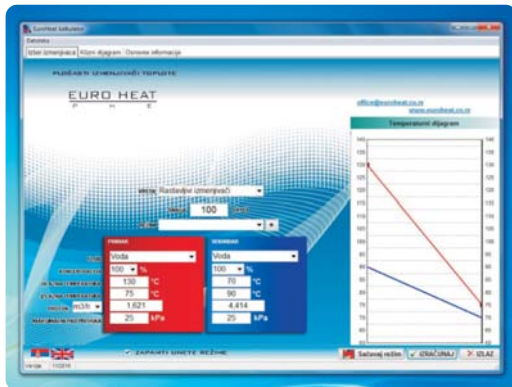


EURO HEAT CALC

is our own software based on calculations and measurements performed in our own laboratory. Software is created so that end user can easy and efficiently calculate necessary heat exchanger by inputting parameters such as heat load, temperature regimes and pressure drops. By inputting required parameters software offers list of heat exchangers that meets users demands.




List of heat exchangers contains exchangers which meets requirements with their technical characteristics, structural data, physical properties and technical drawings with the possibility of display all in PDF format.

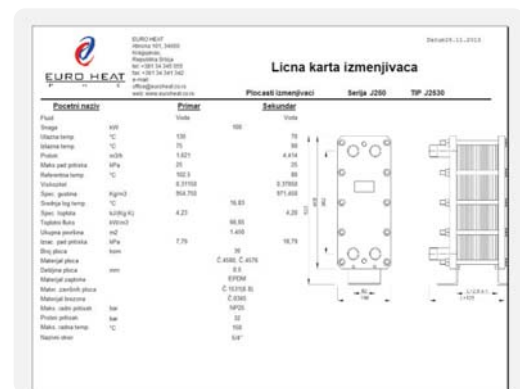

Data sheet of chosen exchanger you can show on screen, save, print...

It is possible to use our software's on mobile phones. They are available for the Android and iOS platform.



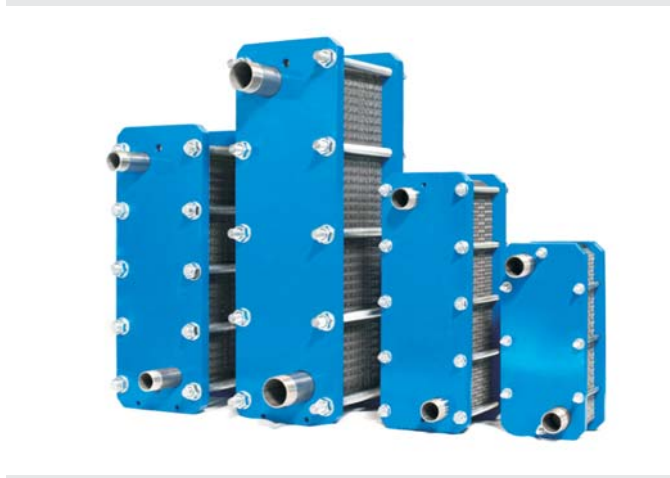





ISO 9001
ISO 14001
ISO 18001



ASHRAE
Engineering for the World We Live In
member

EURO HEAT

INDUSTRIJSKA BB, 34000 KRAGUJEVAC, SERBIA
TEL: +381 34 345 055 / FAX: +381 34 341 342
OFFICE@EUROHEAT.CO.RS / WWW.EUROHEAT.CO.RS