



Vannes

# Valve Key

BUTTERFLY, SINGLE SEAT, MIX PROOF, ASEPTIC, REGULATING, PROCESS VALVES



# TABLE OF CONTENTS

|   |       |
|---|-------|
| SV & SVS Butterfly Valves.....                                      | 3-4   |
| BLV1 Series Ball Valves.....  | 5     |
| SW Series Single Seat Valves.....                                   | 6-7   |
| SWmini Series Fractional Size Single Seat Valves.....               | 8     |
| MS Series Aseptic Diaphragm Single Seat Valves.....                 | 9-10  |
| AP Series Fractional Size Aseptic Diaphragm Single Seat Valves..... | 11    |
| D4 Series Double Seat Mix Proof Valve.....                          | 12    |
| D4 Series Double Seat Mix Proof Changeover Valve.....               | 13    |
| DT4 Tank Outlet And DP4 Piggable Mix Proof Valve.....               | 14    |
| DA4 Double Seat Mix Proof Valve.....                                | 15    |
| SWcip Series Double Seal Mix Proof CIP Valves.....                  | 16    |
| SD Series Double Seal Mix Proof Valves.....                         | 17-18 |
| DKR Series Double Seat Mix Proof Ball Valves.....                   | 19    |
| UF Series Pressure Relief Valves.....                               | 22    |
| RG/RGE Series Modulating Valves.....                                | 21-22 |
| CPV Constant Pressure Valve.....                                    | 23    |
| RUF Spring Check Valve.....   | 24    |
| VPN Spring Check Valve.....   | 25    |
| PR Sample Valve.....  | 26    |
| VRA Vacuum Relief Valve.....  | 27    |
| SI Safety Valve.....  | 28-29 |
| Control Units for all Valves.....                                   | 30    |

# SV & SVS Butterfly Valves




The order code is constructed as follows:

| POSITION | 1   | 2    | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-----|------|---|-----|----|------|----|----|---|----|----|
| CODE     | SV1 | 316L | F | T20 | A1 | C41Y | 20 | TR | E | 10 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

- SV1** Standard (2-piece design)
- SVS1** Intermediate Flanged (4-piece design)
- SVS2** Intermediate Flanges (4-piece design) New version



## (2) MATERIAL OF CONSTRUCTION

- 316L** Housing Material

## (3) PORT CONNECTIONS

- F** Hygienic Flange (SVS1 only)
- T** Clamp (DIN 32676)
- W** Butt weld
- G** DIN Male Thread (DIN 11851)
- S** SMS Swedish Milk Standard (SMS 1145)
- X** Without Counter Flanges (SVS1 only)

Mixed port connections only available for SV1, specify both key identifiers. Example: TS

Additional port connections available upon request.

Please contact factory.

## (4) PORT SIZES

|              |         |            |           |
|--------------|---------|------------|-----------|
| <b>DN25</b>  | DN 25   | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40   | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50   | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65   | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80   | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100  | <b>T40</b> | 4.0" Tube |
| <b>DN125</b> | DN 125  |            |           |
| <b>DN150</b> | DN 150  |            |           |
| <b>DN200</b> | DN 200* |            |           |
| <b>DN250</b> | DN 250* |            |           |

\*SVS1 only

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | AIR TO AIR | MANUAL | ACTUATOR SIZE   | NOMINAL VALVE SIZE    | OPTIONAL VALVE SIZE |
|-----------------|---------------|------------|--------|---|-----------------------|---------------------|
| A1              | A2            | A3         |        | 80 mm diameter  | DN25-DN100 or T10-T40 |                     |
| B1              | B2            | B3         |        | 125 mm diameter   | DN125-DN150 or T60    | DN100 or T40        |
| C1              | C2            |            |        | 180 mm diameter   | DN200-DN250           | DN125, DN150        |
|                 |               |            | H1     | Standard Manual Handle Open/Closed Position                                     | DN25-DN100 or T10-T40 |                     |
|                 |               |            | H1L    | Lockable Manual Handle Open/Closed Position                                     | DN25-DN100 or T10-T40 |                     |
|                 |               |            | H2     | Infinite Position Adjustment Manual Handle                                      | DN25-DN100 or T10-T40 |                     |
|                 |               |            | H3     | Manual Handle with yoke, coupling, and indicator for position feedback*         | DN25-DN100 or T10-T40 |                     |
|                 |               |            | M1     | Metal Multi-position Handle   | DN25-DN250 or T10-T60 |                     |
|                 |               |            | H3L2   | Manual Handle with compact yoke, coupling, and indicator for position feedback* | DN25-DN100 or T10-T40 |                     |

\* Position feedback sensor sold separately.

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "AA0A" as default for valves without control unit or sensor feedback.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |   |
|-------------------|---|
| <b>C4</b>         | <b>CU4 (Ordinary location or ATEX Zone2)***</b> |
| CP                | CU4plus (Ordinary location or ATEX Zone2)***    |
| CX                | IECEX CU (ATEX Zone 1)***                       |
| BE                | TC8692 Electropneumatic Positioner              |

### CU Identifier Position 3

| SOLENOID |                          |
|----------|--------------------------|
| <b>1</b> | <b>1 Solenoid</b>        |
| 9        | 1 Solenoid + NOT Element |

### CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE                                      |
|--------------------|-----------------------|---------------|---|
|                    | COMMUNICATION         | VOLTAGE       |   |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, TC8692, CU4 plus, IECEX CU (ATEX Zone 1)***</b> |
| U                  | Direct Connect        | 110 V AC      | CU4   |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b>                                     |
| S                  | IO-link               | 24V DC        | CU4plus   |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION | ENVIRONMENTAL RATING            |
|-------------------|-------------------|-----------------------|---------------------------------|
| XX                | N/A               | Manual Handle Only    | ATEX Zone 1 compliant***        |
| 2X                | 3X                | No CU / Feedback      | ATEX Zone 1 compliant***        |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    | <b>ATEX Zone 1 compliant***</b> |
| 24                | 34                | 4-pin M12 Connector*  | ATEX Zone 2 compliant***        |
| 25                | 35                | 5-pin M12 Connector** | ATEX Zone 2 compliant***        |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

### \*\*\* Control Unit:

IECEX CU: ex ia\*\*\* / Ex ia IIC T4 Gb

ATEX CU4/CU4plus II 3G Ex ec mc T4 Gc

### \*\*\* Valve:

ATEX 2 G Ex h IIB T6...T3 Gb

## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED ACTUATOR OD | POLISHED ACTUATOR OD | INSIDE POLISH          |
|---------------------------|----------------------|------------------------|
| 10                        | 20                   | 1.6 µm (63 µ-in) Ra ID |
| 11                        | 21                   | 0.8 µm (32 µ-in) Ra ID |

Note: Base valve always has machine finish OD

## (11) OPTIONS

**A0** None

**A1S** 3.1 SPX Inspection Certification

**A3Z1** ATEX Zone 1\*\*\*

**A3Z2** ATEX Zone 2\*\*\*

**C6** Assembled (standard manual handle valve supplied dis-assembled for easier installation into pipeline; standard actuated valve supplied assembled)

# BLV1 Ball Valves



The order code is constructed as follows:

| POSITION | 1    | 2    | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|------|------|---|-----|----|------|----|----|---|----|----|
| CODE     | BLV1 | 316L | W | T15 | A1 | C41Y | 24 | PT | T | 11 | A0 |

## (1) VALVE TYPE

**BLV1** 2-way ball valve

## (2) MATERIAL OF CONSTRUCTION

**316L** Housing Material

## (3) PORT CONNECTIONS



**W** Buttweld

**T** Clamp

## (4) PORT SIZES

|              |         |             |            |
|--------------|---------|-------------|------------|
| <b>DN15</b>  | DIN 15  | <b>T050</b> | 0.5" Tube  |
| <b>DN20</b>  | DIN 20  | <b>T075</b> | 0.75" Tube |
| <b>DN25</b>  | DIN 25  | <b>T10</b>  | 1.0" Tube  |
| <b>DN40</b>  | DIN 40  | <b>T15</b>  | 1.5" Tube  |
| <b>DN50</b>  | DIN 50  | <b>T20</b>  | 2.0" Tube  |
| <b>DN65</b>  | DIN 65  | <b>T25</b>  | 2.5" Tube  |
| <b>DN80</b>  | DIN 80  | <b>T30</b>  | 3.0" Tube  |
| <b>DN100</b> | DIN 100 | <b>T40</b>  | 4.0" Tube  |

## (5) ACTUATOR

| SPRING TO CLOSE | SPRING TO OPEN | AIR TO AIR | MANUAL  | ACTUATOR SIZE                                    | NOMINAL VALVE SIZE     |
|-----------------|----------------|------------|---|--|------------------------|
| A1              | A2             | A3         |   | 80 mm diameter                                   | DN15-DN50 or T050-T20  |
| B1              | B2             | B3         |   | 125 mm diameter                                  | DN65-DN80 or T25-T30   |
| C1              | C2             | C3         |   | 180 mm diameter                                  | DN100 or T40           |
|                 |                |            | <br>H1   | Standard Manual Handle Open/Closed Position      | DN15-DN100 or T050-T40 |
|                 |                |            | <br>H3L2 | Manual Handle with yoke, coupling, and indicator | DN15-DN100 or T050-T40 |

\* Position feedback sensor sold separately.

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "AA0A" as default for valves without control unit or sensor feedback.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

## CU Identifier Position 3

| SOLENOID |                          |
|----------|--------------------------|
| <b>1</b> | <b>1 Solenoid</b>        |
| 9        | 1 Solenoid + NOT Element |

## CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE  |
|--------------------|-----------------------|---------------|---------------------|
|                    | COMMUNICATION         | VOLTAGE       |                     |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4plus</b> |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b> |
| <b>S</b>           | IO-link               | 24V DC        | CU4plus             |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| XX                | N/A               | Manual Handle Only    |
| 2X                | 3X                | No CU / Feedback      |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 25                | 35                | 5-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**PT** PTFE

## (9) SEAL MATERIAL

**T** PTFE

## (10) SURFACE FINISH

| GLASS BLASTED ACTUATOR OD | INSIDE POLISH          |
|---------------------------|------------------------|
| 11                        | 0.8 μm (32 μ-in) Ra ID |

## (11) OPTIONS

**A0** None

# SW Series Single Seat Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|-----|----|------|----|----|---|----|----|
| CODE     | SW | 41 | W | T30 | C1 | CP1Y | 30 | TR | E | 10 | A0 |


NOTE: Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE


**SW** Single Seat Valves

## (2) HOUSING COMBINATIONS

### Shut-off Valves

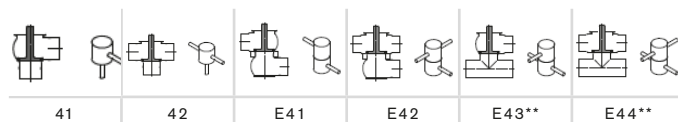


### Tank Outlet Valves\*



\*\*E-style manifold housings are one-piece fully welded

\*Tank flanges ordered separately

### Change-over Valves

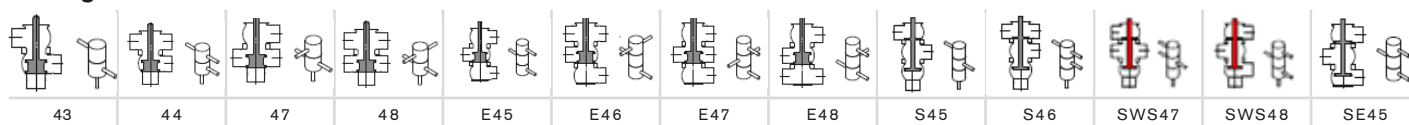

## (3) PORT CONNECTIONS

|   |  |
|---|--|
| <b>W</b> Butt weld                              | <b>I</b> IDF/ISS (International Dairy Flanges) * |
| <b>T</b> Clamp (DIN 32676)                      | <b>G</b> DIN male Thread (DIN 11851) *           |
| <b>K</b> DIN Female Liner and Nut (DIN 11851) * | <b>S</b> SMS Swedish Milk Standard (SMS 1145) *  |

(\*) Not available for large sizes DN 125, DN 150 and T60

Additional and mixed port connections available upon request on certain housing combinations. Please contact factory.

## (4) PORT SIZES

|                     |                      |
|---------------------|----------------------|
| <b>DN25</b> DN 25   | <b>T10</b> 1.0" Tube |
| <b>DN40</b> DN 40   | <b>T15</b> 1.5" Tube |
| <b>DN50</b> DN 50   | <b>T20</b> 2.0" Tube |
| <b>DN65</b> DN 65   | <b>T25</b> 2.5" Tube |
| <b>DN80</b> DN 80   | <b>T30</b> 3.0" Tube |
| <b>DN100</b> DN 100 | <b>T40</b> 4.0" Tube |
| <b>DN125</b> DN 125 |                      |
| <b>DN150</b> DN 150 | <b>T60</b> 6.0" Tube |

For availability of mixed sizes on E-style matrix housings, please contact Factory

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | AIR TO AIR | MANUAL | ACTUATOR SIZE               | NOMINAL VALVE SIZE <sup>1</sup> |
|-----------------|---------------|------------|--------|-----------------------------|---------------------------------|
| A1              | A2            | A3         |        | 74 mm diameter              | DN25, DN40, T10, T15            |
| B1              | B2            | B3         |        | 110 mm diameter             | DN50, DN65, T20, T25            |
| C1              | C2            | C3         |        | 165 mm diameter             | DN80, DN100, T30, T40           |
| D1              | D2            |            |        | 255 mm diameter             | Only DN125, D150, T60           |
| E1              | E2            |            |        | 110 mm diameter Long Stroke | Only DN50 to DN65 & T20 to T25  |
| F1              | F2            |            |        | 165 mm diameter Long Stroke | Only DN80, DN100, T30, T40      |
|                 |               |            | H1     | Manual Hand Actuator        | DN25-DN150 or T10-T60           |

Add "L" to actuator identifier for stroke limiting mid-position actuator (example "B1L"). Only available on A1, B1, C1.

<sup>1</sup> A, B & C sizes can be used beyond the nominal valve sizes DN25-DN100. See instruction manual for holding pressures. For change-over valves, "Normally Closed" = "Fail Down" and "Normally Open" = "Fail Up"

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit. Use identifier "AA0A" for valves with manual handle.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |   |
|-------------------|---|
| <b>C4</b>         | <b>CU4 (Ordinary location or ATEX Zone2)***</b> |
| CP                | CU4plus (Ordinary location or ATEX Zone2)***    |
| CX                | IECEX CU (ATEX Zone 1)***                       |

### CU Identifier Position 3

| SOLENOID |                           |
|----------|---------------------------|
| <b>1</b> | <b>1 Solenoid</b>         |
| 9        | 1 Solenoid + NOT Element* |
| 3        | 3 Solenoid                |

\*Only available up to DN100/T40 size

### CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE                              |
|--------------------|-----------------------|---------------|---|
|                    | COMMUNICATION         | VOLTAGE       |   |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4 plus, IECEX CU (ATEX Zone 1)***</b> |
| U                  | Direct Connect        | 110 V AC      | CU4   |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b>                             |
| S                  | IO-link               | 24V DC        | CU4plus   |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION | ENVIRONMENTAL RATING     |
|-------------------|-------------------|-----------------------|--------------------------|
| XX                |                   | Manual Handle Only    | ATEX Zone 1 compliant*** |
| 2X                | 3X                | No CU / Feedback      | ATEX Zone 1 compliant*** |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    | ATEX Zone 1 compliant*** |
| 24                | 34                | 4-pin M12 Connector*  | ATEX Zone 2 compliant*** |
| 25                | 35                | 5-pin M12 Connector** | ATEX Zone 2 compliant*** |
| 28                | 38                | 8-PIN M12 Connector   | ATEX Zone 2 compliant*** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

### \*\*\* Control Unit:

IECEX CU: ex ia\*\*\* / Ex ia IIC T4 Gb

ATEX CU4/CU4plus II 3G Ex ec mc T4 Gc

### \*\*\* Valve:

ATEX 2 G Ex h IIB T6...T3 Gb

## (10) SURFACE FINISH

|    |  |
|----|--|
| 10 | 1.6 µm (63 µ-in) Ra ID                     |
| 11 | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (11) OPTIONS

**A0** None  
**A1S** 3.1 SPX FLOW Inspection Certificate  
**A3Z1** ATEX Zone 1\*\*\*  
**A3Z2** ATEX Zone 2\*\*\*  
**B1** 3-A certification (at minimum with 0.8 µm (32 µ-in) Ra ID finish)  
**C1** Steam Barrier (DPF)  
**C4** Modulating cone  
**C7** Elastomer shaft seal

For high pressure (hp) options, please contact factory

# SWmini Series Fractional Size Single Seat Valves



The order code is constructed as follows:

| POSITION | 1      | 2  | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|--------|----|---|------|----|------|----|----|---|----|----|
| CODE     | SWmini | 41 | W | T050 | C1 | C41W | 20 | TR | E | 21 | A0 |


\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE


SWmini Single Seat Fractional

## (2) HOUSING COMBINATIONS

### Shut-off Valves



### Change-over Valves



## (3) PORT CONNECTIONS

**W** Buttweld  
**T** Clamp (DIN 32676)

## (4) PORT SIZES

**DN10** DN 10      **T050** 0.5" Tube  
**DN15** DN 15      **T075** 0.75" Tube  
**DN20** DN 20

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | AIR TO AIR | MANUAL | ACTUATOR SIZE   | NOMINAL VALVE SIZE         |
|-----------------|---------------|------------|--------|-----------------|----------------------------|
| G1              | G2            | G3         |        | 50 mm           | Only Used On SWmini Valves |
|                 |               |            | H1     | Manual Actuator |                            |

For change-over valves, "Normally Closed" = "Fail Down" and "Normally Open" = "Fail Up"

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit. Use identifier "AA0A" for valves with manual handle.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |                          |
|----------|--------------------------|
| <b>1</b> | <b>1 Solenoid</b>        |
| 9        | 1 Solenoid + NOT Element |

## CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE  |
|--------------------|-----------------------|---------------|---------------------|
|                    | COMMUNICATION         | VOLTAGE       |                     |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4plus</b> |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b> |
| <b>S</b>           | <b>IO-link</b>        | <b>24V DC</b> | <b>CU4plus</b>      |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
|                   | XX                | Manual Handle Only    |
| 2X                | 3X                | No CU / Feedback      |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 25                | 35                | 5-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seat

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

## (10) SURFACE FINISH

| POLISHED OD | INSIDE POLISH          |
|-------------|------------------------|
| 21          | 0.8 μm (32 μ-in) Ra ID |

## (11) OPTIONS

**A0** None  
**C1** Steam Barrier DPF

Note: 3-A certified design is standard



# MS Series Aseptic Diaphragm Single Seat Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|-----|----|------|----|----|---|----|----|
| CODE     | MS | 41 | W | T20 | B1 | C41W | 30 | TR | E | 11 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)


## (1) VALVE TYPE

**MS** Diaphragm Style with Metal Stem and Elastomeric Seat Seal


**MSP** Diaphragm Style with PTFE Stem

## (2) HOUSING COMBINATIONS

### Shut-off Valves




### Tank Outlet Valves\*



\*Tank flanges ordered separately

### Change-over Valves\*



\*Change-over valves only available as MS type

## (3) PORT CONNECTIONS

**W** Buttweld

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | AIR TO AIR | MANUAL | ACTUATOR SIZE        | NOMINAL VALVE SIZE <sup>1</sup>  |
|-----------------|---------------|------------|--------|----------------------|----------------------------------|
| A1              | A2            | A3         |        | 74 mm diameter       | DN25, T10                        |
| B1              | B2            | B3         |        | 110 mm diameter      | DN40, DN50, T15, T20             |
| C1              | C2            | C3         |        | 165 mm diameter      | DN65, DN80, DN100, T25, T30, T40 |
|                 |               |            | H1     | Manual Hand Actuator | DN25-DN100 or T10-T40            |

Add "L" to actuator identifier for stroke limiting mid-position actuator (example "B1L"). Only available on A1, B1, C1.

<sup>1</sup> A, B & C sizes can be used beyond the nominal valve sizes DN25-DN100. See instruction manual for holding pressures.

For change-over valves, "Normally Closed" = "Fail Down" and "Normally Open" = "Fail Up"

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit. Use identifier "AA0A" for valves with manual handle.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |                           |
|----------|---------------------------|
| <b>1</b> | <b>1 Solenoid</b>         |
| 9        | 1 Solenoid + NOT Element* |
| 3        | 3 Solenoid                |

\*Not available with MSP type

### CU Identifier Position 4

| COMMUNICATION TYPE |                       |                 | CU UNITS AVAILABLE  |
|--------------------|-----------------------|-----------------|---------------------|
|                    | COMMUNICATION         | VOLTAGE         |                     |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b>   | <b>CU4, CU4plus</b> |
| <b>U</b>           | <b>Direct Connect</b> | <b>110 V AC</b> | <b>CU4</b>          |
| <b>Y</b>           | <b>AS-i 62</b>        |                 | <b>CU4, CU4plus</b> |
| S                  | IO-link               | 24V DC          | CU4plus             |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| XX                |                   | Manual Handle Only    |
| 2X                | 3X                | No CU / Feedback      |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 25                | 35                | 5-pin M12 Connector** |
| 28                | 38                | 8-PIN M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

- TR** Elastomeric Profile Seat
- PT** PTFE Stem (MSP only)

## (9) SEAL MATERIAL

- E** EPDM
- V** FPM
- H** HNBR
- T** PTFE (MSP only)

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10*              | 1.6 μm (63 μ-in) Ra ID                     |
| 11               | 0.8 μm (32 μ-in) Ra ID with Electro-Polish |

\*Not available with MSP type

## (11) OPTIONS

- A0** None
- A1S** 3.1 SPX FLOW Inspection Certificate
- B1** 3-A certification (at minimum with 0.8 μm (32 μ-in) Ra ID surface finish)
- C1** Shaft flush for large sizes

# AP Series Fractional Size Aseptic Diaphragm Single Seat Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4    | 5   | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|------|-----|------|----|----|---|----|----|
| CODE     | AP | 11 | W | DN10 | TC1 | AA0A | 2X | PT | T | 22 | A1 |


\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**AP** Fractional Size Diaphragm Style with PTFE Stem

## (2) HOUSING COMBINATIONS

### Shut-off Valves



## (3) PORT CONNECTIONS

**W** Buttweld

**T** Clamp (DIN 32676)

## (4) PORT SIZES

**DN10** DN 10      **T050** 0.5" Tube

**DN15** DN 15

**DN20** DN 20

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | AIR TO AIR | MANUAL | ACTUATOR             |
|-----------------|---------------|------------|--------|----------------------|
| TC1             | TC2           | TC3        |        | Techno Air Actuator  |
|                 |               |            | HT     | Techno Hand Actuator |

## (6) FEEDBACK

| IDENTIFIER | DESCRIPTION   |
|------------|---|
| AA0A       | No CU   |
| HP0N       | 2 Prox (open/closed) - Prox Holder only (no switches) |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| XX                |                   | Manual Handle Only    |
| 2X                | 3X                | No CU / Feedback      |

## (8) SEAT TYPE

**PT** PTFE Stem

## (9) SEAL MATERIAL

**T** PTFE

## (10) SURFACE FINISH

| POLISHED OD | INSIDE POLISH  |
|-------------|--|
| 22          | Techno Only - 0.5 µm (20 µ-in) Ra ID with Electro-Polish |

## (11) OPTIONS

**A1** 3.1 Certification

**Note: 3-A certified design is standard**

# D4 Series Double Seat Mix Proof Valve



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11* |
|----------|----|----|---|-----|----|------|----|----|---|----|-----|
| CODE     | D4 | 44 | W | T30 | SL | C43W | 20 | TR | E | 11 | A0  |

\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**D4** Double Seat Mix Proof

## (2) HOUSING COMBINATIONS

### Shut-off Valves



## (3) PORT CONNECTIONS

**W** Buttweld

Additional and mixed port connections available upon request. Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |
| <b>DN125</b> | DN 125 |            |           |
| <b>DN150</b> | DN 150 | <b>T60</b> | 6.0" Tube |

For mixed size valves, indicate lower ports first.  
Example: 1.5" Lower Housing by 2" Upper Housing is T15T20.  
To verify availability of mixed sizes, please contact Factory

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION      |
|------------|------------------|
| NSL        | Non Seat Lifting |
| SL         | Seat Lifting     |

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |  |
|-------------------|--|
| <b>C4</b>         | <b>CU4 (Ordinary location or ATEX Zone 2)***</b> |
| CP                | CU4plus (Ordinary location or ATEX Zone 2)***    |
| CX                | IECEX CU (ATEX Zone 1)***                        |

### \*\*\* Control Unit:

IECEX CU: ex ia\*\*\* / Ex ia IIC T4 Gb  
ATEX CU4/CU4plus: II 3G Ex ec mc T4 Gc

### \*\*\* Valve:

ATEX 2 G Ex h IIB T6...T3 Gb

## CU Identifier Position 3

| SOLENOID |             |
|----------|-------------|
| 1        | 1 Solenoid* |
| 3        | 3 Solenoids |

\*Not available with seat lift actuator

## CU Identifier Position 4

|          | COMMUNICATION TYPE    |               | CU UNITS AVAILABLE                              |
|----------|-----------------------|---------------|---|
|          | COMMUNICATION         | VOLTAGE       |   |
| <b>W</b> | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4 plus, IECEX CU (ATEX Zone 1)***</b> |
| <b>Y</b> | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b>                             |
| <b>S</b> | <b>IO-link</b>        | <b>24V DC</b> | <b>CU4plus</b>                                  |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | ELECTRICAL CONNECTION | ENVIRONMENTAL COMPLIANCE |
|-------------------|-----------------------|--------------------------|
| 2X                | No CU / Feedback      | ATEX Zone 1 compliant*** |
| <b>20</b>         | <b>Cable Gland</b>    | ATEX Zone 1 compliant*** |
| 24                | 4-pin M12 Connector*  | ATEX Zone 2 Compliant*** |
| 25                | 5-pin M12 Connector** | ATEX Zone 2 Compliant*** |
| 28                | 8-pin M12 Connector** | ATEX Zone 2 Compliant*** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 µm (32 µ-in) Ra ID |

## (11) OPTIONS

**A0** None  
**A3Z1** ATEX Zone 1\*\*\*  
**A3Z2** ATEX Zone 2\*\*\*

**NOTE: 3-A certified design is standard**

# D4 Series Double Seat Mix Proof Changeover Valve



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11* |
|----------|----|----|---|-----|----|------|----|----|---|----|-----|
| CODE     | D4 | 44 | W | T30 | SL | C43W | 20 | TR | E | 11 | A0  |


\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**D4** Double Seat Mix Proof

## (2) HOUSING COMBINATIONS

### Change-over Valves



## (3) PORT CONNECTIONS

**W** Buttweld

Additional and mixed port connections available upon request. Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION  |
|------------|--------------|
| SL         | Seat Lifting |

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |             |
|----------|-------------|
| 3        | 3 Solenoids |

\*Not available with seat lift actuator

### CU Identifier Position 4

|          | COMMUNICATION TYPE    |               | CU UNITS AVAILABLE   |
|----------|-----------------------|---------------|----------------------|
|          | COMMUNICATION         | VOLTAGE       |                      |
| <b>W</b> | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4 plus</b> |
| <b>Y</b> | <b>AS-i 62</b>        |               | <b>CU4, CU4 plus</b> |
| <b>S</b> | IO-link               | 24V DC        | CU4plus              |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU / Feedback      |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 28                | 38                | 8-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

|          |      |
|----------|------|
| <b>E</b> | EPDM |
| <b>V</b> | FPM  |
| <b>H</b> | HNBR |

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 μm (32 μ-in) Ra ID |

## (11) OPTIONS

**A0** None

**NOTE: 3-A certified design is standard**

# DT4 Tank Outlet And DP4 Piggable Mix Proof Valve



Tank Outlet Piggable

The order code is constructed as follows:

| POSITION | 1   | 2   | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11* |
|----------|-----|-----|---|------|----|------|----|----|---|----|-----|
| CODE     | DT4 | T42 | W | DN65 | SL | C43Y | 24 | TR | E | 11 | C1  |

## (1) VALVE TYPE

- DT4** Tank Outlet Mix Proof  
**DP4** Piggable Mix Proof Valve

## (2) HOUSING COMBINATIONS

### Shut-off Valves

| Tank Outlet | Piggable |      |
|-------------|----------|------|
|             |          |      |
| T42         | DP42     | DP44 |

## (3) PORT CONNECTIONS

**W** Buttweld

Additional port connections available upon request. Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION  |
|------------|--------------|
| SL         | Seat Lifting |

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |             |
|----------|-------------|
| 3        | 3 Solenoids |

### CU Identifier Position 4

|          | COMMUNICATION TYPE    |               | CU UNITS AVAILABLE  |
|----------|-----------------------|---------------|---------------------|
|          | COMMUNICATION         | VOLTAGE       |                     |
| <b>W</b> | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4plus</b> |
| <b>Y</b> | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b> |
| <b>S</b> | IO-link               | 24V DC        | CU4plus             |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-----------------------|
| 2X                | No CU / Feedback      |
| <b>20</b>         | <b>Cable Gland</b>    |
| 24                | 4-pin M12 Connector*  |
| 28                | 8-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 μm (32 μ-in) Ra ID |

## (11) OPTIONS

**C1** Shaft flush

**NOTE:** Shaft flush and 3-A certified design as standard

# DA4 Double Seat Mix Proof Valve



The order code is constructed as follows:

| POSITION | 1   | 2  | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11* |
|----------|-----|----|---|------|----|------|----|----|---|----|-----|
| CODE     | DA4 | 44 | W | DN50 | SL | C43Y | 20 | TR | E | 11 | A0  |

\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**DA4** Advanced Ultra-Hygienic Double Seat Mix Proof

## (2) HOUSING COMBINATIONS

### Shut-off Valves



Use identifier "40" for replacement insert (less housing) to upgrade an existing DA3+ valve. New control unit is required to adapt to D4 series valves.

## (3) PORT CONNECTIONS

**W** Buttweld

Additional and mixed port connections available upon request. Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

For mixed size valves, indicate lower ports first.

Example: 1.5" Lower Housing by 2" Upper Housing is **T15T20**.

To verify availability of mixed sizes, please contact Factory

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION   |
|------------|---|
| SL         | Seat Lifting (Includes Integrated Upper and Lower Shaft Flush for extensive cleaning and minimal CIP losses to drain) |

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |             |
|----------|-------------|
| 3        | 3 Solenoids |

### CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE  |
|--------------------|-----------------------|---------------|---------------------|
|                    | COMMUNICATION         | VOLTAGE       |                     |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4plus</b> |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b> |
| <b>S</b>           | <b>IO-link</b>        | <b>24V DC</b> | <b>CU4plus</b>      |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU                 |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 28                | 38                | 8-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

|          |      |
|----------|------|
| <b>E</b> | EPDM |
| <b>V</b> | FPM  |
| <b>H</b> | HNBR |

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 μm (32 μ-in) Ra ID |

## (11) OPTIONS

|           |                   |
|-----------|-------------------|
| <b>A0</b> | None              |
| <b>C1</b> | Steam Barrier DPF |

**NOTE: 3-A certified design is standard**

# SWcip Series Double Seal Mix Proof CIP Valves



The order code is constructed as follows:


| POSITION | 1     | 2  | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-------|----|---|-----|----|------|----|----|---|----|----|
| CODE     | SWcip | 41 | W | T25 | B1 | C41W | 30 | TR | E | 10 | A0 |

## (1) VALVE TYPE

**SWcip** Double Seal Mix Proof CIP Valve

## (2) HOUSING COMBINATIONS

### Shut-off Valves



## (3) PORT CONNECTIONS

**W** Buttweld

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |
| <b>DN125</b> | DN 125 |            |           |
| <b>DN150</b> | DN 150 | <b>T60</b> | 6.0" Tube |

## (5) ACTUATOR

| NORMALLY CLOSED | ACTUATOR SIZE   | STANDARD VALVE SIZE <sup>1</sup> |
|-----------------|-----------------|----------------------------------|
| A1              | 74 mm diameter  | DN25, DN40, T10, T15             |
| B1              | 110 mm diameter | DN50, DN65, T20, T25             |
| C1              | 165 mm diameter | DN80, DN100, T30, T40            |
| D1              | 255 mm diameter | DN125, DN150, T60                |

<sup>1</sup>See instruction manual pressure data chart for holding pressures

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |                          |
|----------|--------------------------|
| <b>1</b> | <b>1 Solenoid</b>        |
| 9        | 1 Solenoid + NOT Element |

### CU Identifier Position 4

|          | COMMUNICATION TYPE    |               | CU UNITS AVAILABLE  |
|----------|-----------------------|---------------|---------------------|
|          | COMMUNICATION         | VOLTAGE       |                     |
| <b>W</b> | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4plus</b> |
| <b>Y</b> | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b> |
| S        | IO-link               | 24V DC        | CU4plus             |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU / Feedback      |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    |
| 24                | 34                | 4-pin M12 Connector*  |
| 25                | 35                | 5-pin M12 Connector** |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

**E** EPDM

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID                     |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (11) OPTIONS

**A0** None

**A1S** 3.1 SPX Inspection Certification



# SD Series Double Seal Mix Proof Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|------|----|------|----|----|---|----|----|
| CODE     | SD | 41 | W | DN65 | B1 | C49Y | 20 | TR | E | 10 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)


## (1) VALVE TYPE

**SD** Double Seal Mix Proof


**SDMS** Aseptic Double Seal Mix Proof

## (2) HOUSING COMBINATIONS

### Shut-off Valves




### Tank Outlet Valves\*



\*Tank flanges ordered separately

### Change-over Valves



## (3) PORT CONNECTIONS

**W** Buttweld

Additional and mixed port connections available upon request.  
Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| NORMALLY CLOSED | ACTUATOR SIZE   | NOMINAL VALVE SIZE <sup>1</sup> |
|-----------------|-----------------|---------------------------------|
| A1              | 74 mm diameter  | DN25, DN40, T10, T15            |
| B1              | 110 mm diameter | DN50, DN65, T20, T25            |
| C1              | 165 mm diameter | DN80, DN100, T30, T40           |

<sup>1</sup> A, B & C sizes are available on all sizes DN25-DN100 see instruction manual for holding pressures  
For change-over valves, "Normally Closed" = "Fail Down" and "Normally Open" = "Fail Up"  
For SDMS type, nominal actuator sizes will vary. Please confirm configuration with factory.

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "HP0N" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |   |
|-------------------|---|
| <b>C4</b>         | <b>CU4 (Ordinary location or ATEX Zone2)***</b> |
| CP                | CU4plus (Ordinary location or ATEX Zone2)***    |
| CX                | IECEX CU (ATEX Zone 1)**                        |

### CU Identifier Position 3

| SOLENOID |                                 |
|----------|---------------------------------|
| 1        | 1 Solenoid                      |
| <b>9</b> | <b>1 Solenoid + NOT Element</b> |

### CU Identifier Position 4

| COMMUNICATION TYPE |                       |               | CU UNITS AVAILABLE                              |
|--------------------|-----------------------|---------------|---|
|                    | COMMUNICATION         | VOLTAGE       |   |
| <b>W</b>           | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4 plus, IECEX CU (ATEX Zone 1)***</b> |
| <b>Y</b>           | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b>                             |
| S                  | IO-link               | 24V DC        | CU4plus   |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION | ENVIRONMENTAL RATING            |
|-------------------|-------------------|-----------------------|---------------------------------|
| 2X                | 3X                | No CU / Feedback      | ATEX Zone 1 compliant***        |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    | <b>ATEX Zone 1 compliant***</b> |
| 24                | 34                | 4-pin M12 Connector*  | ATEX Zone 2 compliant***        |
| 25                | 35                | 5-pin M12 Connector** | ATEX Zone 2 compliant***        |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

### \*\*\* Control Unit:

IECEX CU: ex ia\*\*\* / Ex ia IIC T4 Gb

ATEX CU4/CU4plus II 3G Ex ec mc T4 Gc

### \*\*\* Valve:

ATEX 2 G Ex h IIB T6...T3 Gb

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                                |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID                       |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish** |

## (11) OPTIONS

**A0** None

**A1S** 3.1 SPX Inspection Certification

**A3Z1** ATEX Zone 1\*\*\*

**A3Z2** ATEX Zone 2\*\*\*

**C1** Steam barrier (DPF)\*

Notes: 3-A certified design is standard with minimum 0.8 µm (32 µ-in) Ra ID surface finish.

\*Not available with SDMS type.

\*\*Only available for SDMS4 models

# DKR Series Double Seat Mix Proof Ball Valves



The order code is constructed as follows:

| POSITION | 1   | 2 | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-----|---|---|------|----|------|----|----|---|----|----|
| CODE     | DKR | S | F | DN65 | A1 | C41Y | 20 | PT | E | 10 | A0 |


\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**DKR** Double Seat Mix Proof Ball Valve

## (2) HOUSING COMBINATIONS

**Standard**



**High Pressure**



\* Only available in sizes DN50 and DN80

## (3) PORT CONNECTIONS

**F** Hygienic Flange

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |
| <b>DN125</b> | DN 125 |            |           |

## (5) ACTUATOR

| NORMALLY CLOSED | NORMALLY OPEN | ACTUATOR SIZE   | STANDARD VALVE SIZE   |
|-----------------|---------------|-----------------|-----------------------|
| A1              | A2            | 80 mm diameter  | DN25-DN65 or T10-T25  |
| B1              | B2            | 125 mm diameter | DN80-DN100 or T30-T40 |
| C1              | C2            | 180 mm diameter | DN125                 |

## (6) CONTROL UNIT / FEEDBACK

See page 31 for most common control unit configurations. **BOLD** indicates standard control unit options. Use identifier "AA0A" as default for valves without control unit.

### CU Identifier Positions 1 & 2

| CONTROL UNIT TYPE |            |
|-------------------|------------|
| <b>C4</b>         | <b>CU4</b> |
| CP                | CU4plus    |

### CU Identifier Position 3

| SOLENOID |                   |
|----------|-------------------|
| <b>1</b> | <b>1 Solenoid</b> |

\*\*\* Valve:

ATEX 2D IIB TX

## CU Identifier Position 4

|          | COMMUNICATION TYPE    |               | CU UNITS AVAILABLE   |
|----------|-----------------------|---------------|----------------------|
|          | COMMUNICATION         | VOLTAGE       |                      |
| <b>W</b> | <b>Direct Connect</b> | <b>24V DC</b> | <b>CU4, CU4 plus</b> |
| <b>Y</b> | <b>AS-i 62</b>        |               | <b>CU4, CU4plus</b>  |
| <b>S</b> | IO-link               | 24V DC        | CU4plus              |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION | ENVIRONMENTAL RATING |
|-------------------|-------------------|-----------------------|----------------------|
| 2X                | 3X                | No CU / Feedback      | -                    |
| <b>20</b>         | <b>30</b>         | <b>Cable Gland</b>    | -                    |
| 24                | 34                | 4-pin M12 Connector*  | -                    |
| 25                | 35                | 5-pin M12 Connector** | -                    |

\*Available on CU with AS-i and IO-link communication

\*\*Only available on CU with Direct Connect Wire

## (8) SEAT TYPE

**PT** PTFE Seal

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID                     |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (11) OPTIONS

**A0** None  
**A3Z1** ATEX Zone 1\*\*\*  
**C8** Leakage Reduction  
**SC** CIP Stainless External Flush

Note: For horizontal valve installation in horizontal or vertical pipelines, please contact factory for special drain options

# UF Series Pressure Relief Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4    | 5   | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|------|-----|------|----|----|---|----|----|
| CODE     | UF | 31 | W | DN40 | NSL | AA0A | 2X | TR | E | 10 | L1 |

\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE


- UF** Pressure Relief Valve  
**UFR** Pressure Relief Valve with Tapered Stem

## (9) SEAL MATERIAL

- E** EPDM  
**V** FPM  
**H** HNBR

## (2) HOUSING COMBINATIONS

### Shut-off Valves

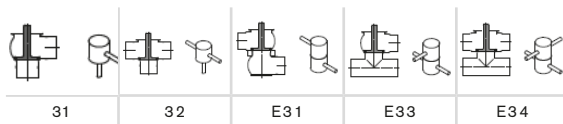

## (3) PORT CONNECTIONS

- W** Buttweld  
 Additional and mixed port connections available upon request. Please contact factory.

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION      |
|------------|------------------|
| NSL        | Non Seat Lifting |
| SL         | Seat Lifting     |

## (6) CONTROL UNIT / FEEDBACK

| IDENTIFIER | DESCRIPTION       |
|------------|-------------------|
| AA0A       | No CU / Feedback* |

\*Prox holder brackets and sensors ordered separately

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU / Feedback      |

## (8) SEAT TYPE

- TR** Elastomeric Profile Seal

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID                     |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (11a) PRESSURE RELIEF RANGE IN BAR (REQUIRED)

| UF           |                             |           |           |           |
|--------------|-----------------------------|-----------|-----------|-----------|
| VALVE SIZE   | PRESSURE RELIEF RANGE (BAR) |           |           |           |
| T10<br>DN25  | <b>LP</b>                   | <b>L1</b> |           |           |
|              | 0-6.8                       | 0-10      |           |           |
| T15<br>DN40  | <b>LM</b>                   | <b>LR</b> | <b>L1</b> |           |
|              | 0-3.5                       | 0-7.5     | 0-10      |           |
| T20<br>DN50  | <b>LK</b>                   | <b>LN</b> | <b>L1</b> |           |
|              | 0-2.1                       | 0-4.5     | 0-10      |           |
| T25<br>DN65  | <b>LK</b>                   | <b>LL</b> | <b>LS</b> | <b>L1</b> |
|              | 0-2.1                       | 0-2.7     | 0-7.6     | 0-10      |
| T30<br>DN80  | <b>LY</b>                   | <b>L3</b> | <b>LZ</b> | <b>L1</b> |
|              | 0-0.9                       | 0-1.8     | 0-5.2     | 0-10      |
| T40<br>DN100 | <b>LW</b>                   | <b>LH</b> | <b>LM</b> | <b>LT</b> |
|              | 0-0.6                       | 0-1.2     | 0-3.5     | 0-8.3     |

| UFR          |                             |           |           |           |
|--------------|-----------------------------|-----------|-----------|-----------|
| VALVE SIZE   | PRESSURE RELIEF RANGE (BAR) |           |           |           |
| T10<br>DN25  | <b>L8</b>                   | <b>L1</b> |           |           |
|              | 0-5.4                       | 0-10      |           |           |
| T15<br>DN40  | <b>L5</b>                   | <b>L9</b> | <b>L1</b> |           |
|              | 0-2.9                       | 0-6.3     | 0-10      |           |
| T20<br>DN50  | <b>L3</b>                   | <b>L6</b> | <b>L1</b> |           |
|              | 0-1.8                       | 0-4.0     | 0-10      |           |
| T25<br>DN65  | <b>L2</b>                   | <b>L4</b> | <b>LA</b> | <b>L1</b> |
|              | 0-1.1                       | 0-2.4     | 0-7.0     | 0-10      |
| T30<br>DN80  | <b>LX</b>                   | <b>LJ</b> | <b>L7</b> | <b>L1</b> |
|              | 0-0.8                       | 0-1.7     | 0-4.8     | 0-10      |
| T40<br>DN100 | <b>LU</b>                   | <b>L2</b> | <b>LQ</b> | <b>LB</b> |
|              | 0-0.5                       | 0-1.1     | 0-3.2     | 0-7.7     |

The minimum response pressure can be > 0 bar depending on the valve mounting position and the friction on the shaft seal. For higher relief pressure options, please contact Factory.

## (11b) OPTIONS

- A3Z1** ATEX Zone 1\*\*\*  
**B1** 3-A certification (at minimum with 0.8 µm (32 µ-in) Ra ID surface finish)

\*\*\* Valve:

ATEX 2 G Ex h IIB T6...T3 Gb

# RG/RGE Series Modulating Valves



The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4           | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|---|-------------|----|------|----|----|---|----|----|
| CODE     | RG | 41 | F | T30<br>(63) | C1 | S20W | 30 | LL | E | 10 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)


For sizing of new modulating valve applications, please [CLICK HERE](#) to complete the RG specification sheet

## (1) VALVE TYPE

- RG** Regulating
- RGE** Regulating Economical
- RGMS** Aseptic Membrane Regulating

## (2) HOUSING COMBINATIONS

### Shut-off Valves



41

For additional housing combinations, please contact factory

## (3) PORT CONNECTIONS

- F** Hygienic Flange (standard on RG/RGMS)
- W** Buttweld (Only on RGE)
- X** Without Counter Flanges

Additional connections available upon request. Please contact factory.

## (4) PORT SIZES (FLOW COEFFICIENT)

| PORT SIZES (FLOW COEFFICIENT) |        |            |           | RG KV VALUE (M <sup>3</sup> /H) <sup>1</sup> | RGE KV VALUE (M <sup>3</sup> /H) <sup>1</sup> |
|-------------------------------|--------|------------|-----------|--|---|
| <b>DN25</b>                   | DN 25  | <b>T10</b> | 1.0" Tube | 0.25, 0.4, 0.63, 1.0, 1.6, 2.5, 4.0, 6.3, 10 | 6.3, 10                                       |
| <b>DN40</b>                   | DN 40  | <b>T15</b> | 1.5" Tube | 2.5, 4.0, 6.3, 10, 16, 25                    | 16, 25  |
| <b>DN50</b>                   | DN 50  | <b>T20</b> | 2.0" Tube | 4.0, 6.3, 10, 16, 25, 40                     | 40  |
| <b>DN65</b>                   | DN 65  | <b>T25</b> | 2.5" Tube | 16, 25, 40, 63                               | 63  |
| <b>DN80</b>                   | DN 80  | <b>T30</b> | 3.0" Tube | 40, 63, 100                                  | 100   |
| <b>DN100</b>                  | DN 100 | <b>T40</b> | 4.0" Tube | 63, 100, 160                                 | 160   |
| <b>DN125</b>                  | DN 125 |            |           | 100, 160, 250                                | N/A   |

<sup>1</sup>For key use port size with (Kv) in parentheses. Example: T20(6.3).

Kv chart shows all possible combinations of Kv based on valve size

## (5) ACTUATOR

| SPRING CLOSING MFS | SPRING OPENING MFH | MANUAL | ACTUATOR SIZE                        | RECOMMENDED KV-VALUES (M <sup>2</sup> /H)                |
|--------------------|--------------------|--------|--------------------------------------|--|
| A1                 |                    |        | 120cm <sup>2</sup> actuating surface | 0.25, 0.4, 0.63, 1.0, 1.6, 2.5, 4.0, 6.3, 10             |
| B1                 |                    |        | 240cm <sup>2</sup> actuating surface | 16, 25   |
| C1                 |                    |        | 350cm <sup>2</sup> actuating surface | 40, 63, 80, 100  |
| D1                 |                    |        | 700cm <sup>2</sup> actuating surface | 160, 250, 400  |
|                    | A2                 |        | 120cm <sup>2</sup> actuating surface | 0.25, 0.4, 0.63, 1.0, 1.6, 2.5, 4.0, 6.3, 10, 16, 25, 40 |
|                    | B2                 |        | 240cm <sup>2</sup> actuating surface | 63, 80   |
|                    | C2                 |        | 350cm <sup>2</sup> actuating surface | 100  |
|                    | D2                 |        | 700cm <sup>2</sup> actuating surface | 160, 250, 400  |
|                    |                    | H1     | Manual Hand Actuator                 | Full range: 0.25-160                                     |

For special requests, please fill out the specification sheet and contact factory.

For holding pressures on actuators, please see instruction manual.

For actuator and Kv combinations that are not displayed, please contact factory for verification or fill out specification sheet.

## (6) POSITIONER

**BOLD** indicates standard positioner option. Use identifier "AA0A" for valves without positioners (manual hand actuator)

| IDENTIFIER                   | DESCRIPTION   |
|------------------------------|---|
| <b>INTEGRATED DESIGN</b>     |   |
| S00W                         | Samson EP I/P (4-20mA) Model IP3725                                 |
| <b>S20W</b>                  | <b>Samson EP I/P (4-20mA) Model IP3730-1 (Auto-tune) - standard</b> |
| <b>EXTERNAL MOUNT DESIGN</b> |   |
| SN0W                         | Samson Namur mount EP I/P (4-20mA) Model IP763*                     |

\* Available for RG/RGE models

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| XX                |                   | Manual Handle Only    |
| 2X                | 3X                | No Positioner         |
| 20                | 30                | <b>Cable Gland</b>    |

## (8) STEM TYPE

**LL** Linear

**EP** Equal Percentage

All seats contain elastomer seat seal except DN25/T10 with 0.25-1.6 Kv values

## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID*                    |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

\*Only available with RGE type

## (11) OPTIONS

**A0** None

**A1S** 3.1 SPX FLOW Inspection Certificate

**A8** Noise Reducer\*

**B1** 3-A certification (only with 0.8 µm (32 µ-in) Ra ID surface finish)

**D4** No Seat Seal

\*Only available with RG/RGMS types

# CPV Constant Pressure Valve



The order code is constructed as follows:

| POSITION | 1   | 2 | 3 | 4       | 5   | 6    | 7  | 8 | 9 | 10 | 11 |
|----------|-----|---|---|---------|-----|------|----|---|---|----|----|
| CODE     | CPV | O | W | T20(25) | STD | AA0A | 2X | M | E | 11 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)


## (1) VALVE TYPE

**CPV** Constant Pressure Valve

## (2) APPLICATION


### Constant Pressure Before Valve

**O**  
(increasing product pressure acts to open the valve)



### Constant Pressure After Valve

**C**  
(increasing product pressure acts to close the valve)



## (3) PORT CONNECTIONS

**W** Buttweld

## (4) PORT SIZES (FLOW COEFFICIENT)

| APPLICATION | PORT SIZES (FLOW COEFFICIENT) |       |           |           | MAXIMUM FLOW (M <sup>3</sup> /H) |
|-------------|-------------------------------|-------|-----------|-----------|----------------------------------|
| CPV-O       | DN50(25)                      | DN 50 | T20(25)   | 1.0" Tube | 25                               |
|             | DN50(10)                      |       | T20(10)   |           | 10                               |
|             | DN50(3)                       |       | T20(3)    |           | 3                                |
| CPV-C       | DN50(22.5)                    | DN 50 | T20(22.5) | 1.5" Tube | 22.5                             |

Note: Additional flow coefficient (Kvs) values available upon request. Please contact Factory.

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION |
|------------|-------------|
| STD        | Standard    |

## (6) CONTROL UNIT / FEEDBACK

| IDENTIFIER | DESCRIPTION     |
|------------|-----------------|
| AA0A       | No CU available |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | CONNECTION TYPE  |
|-------------------|-------------------|------------------|
| 2X                | N/A               | No CU / Feedback |

## (8) SEAT TYPE

**M** Metal

## (9) SEAL MATERIAL

**T** PTFE/EPDM (standard)

**E** EPDM

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 μm (32 μ-in) Ra ID |

## (11) OPERATING RANGE (REQUIRED)

**B9** 0.8-7.0 bar (11.6-101.5 psi) only with PTFE/EPDM seal material standard

**B8** 0.3-3.0 bar (4.4-43.5 psi) only with EPDM seal material

**A1S** 3.1 SPX Inspection Certification

Note: 3-A certified design is standard

# RUF Spring Check Valve



The order code is constructed as follows:

| POSITION | 1   | 2 | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-----|---|---|-----|----|------|----|----|---|----|----|
| CODE     | RUF | S | F | T30 | NA | AA0A | XX | TR | E | 11 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)

## (1) VALVE TYPE

**RUF** Spring Check Non-Return Valve

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (2) HOUSING COMBINATIONS

**S** Standard

## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

## (3) PORT CONNECTIONS

**F** Hygienic Flange

**X** Without Counter Flanges

## (10) SURFACE FINISH

| GLASS BLASTED OD | POLISHED OD | INSIDE POLISH                              |
|------------------|-------------|--|
| 11               | 21          | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (4) PORT SIZES

**DN25** DN 25      **T10** 1.0" Tube

**DN40** DN 40      **T15** 1.5" Tube

**DN50** DN 50      **T20** 2.0" Tube

**DN65** DN 65      **T25** 2.5" Tube

**DN80** DN 80      **T30** 3.0" Tube

**DN100** DN 100      **T40** 4.0" Tube

**DN125** DN 125

**DN150** DN 150      **T60** 6.0" Tube

## (11) OPTIONS

**A0** None

**L13** 0-16 Bar (standard for 1"-1.5", DN25-DN-40)

**A1S** 3.1 SPX Inspection Certification

**Note: 3-A certified design is standard**

Schedule 5 and 10 pipe sizes available upon request. Please contact Factory

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION |
|------------|-------------|
| NA         | N/A         |

## (6) CONTROL UNIT / FEEDBACK

| IDENTIFIER | DESCRIPTION           |
|------------|-----------------------|
| AA0A       | No feedback available |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| IDENTIFIER | DESCRIPTION |
|------------|-------------|
| XX         | N/A         |



# VPN Spring Check Valve



The order code is constructed as follows:

| POSITION | 1   | 2 | 3 | 4   | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-----|---|---|-----|----|------|----|----|---|----|----|
| CODE     | VPN | S | W | T10 | NA | AA0A | XX | TR | E | 10 | A0 |

## (1) VALVE TYPE

**VPN** Spring Check Non-Return Valve

## (2) HOUSING COMBINATIONS

**S** Standard

## (3) PORT CONNECTIONS

**W** Buttweld

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION |
|------------|-------------|
| NA         | N/A         |

## (6) CONTROL UNIT / FEEDBACK

| IDENTIFIER | DESCRIPTION           |
|------------|-----------------------|
| AA0A       | No feedback available |

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| IDENTIFIER | DESCRIPTION |
|------------|-------------|
| XX         | N/A         |

## (8) SEAT TYPE

**TR** Elastomeric Profile Seat

## (9) SEAL MATERIAL

**E** EPDM


## (10) SURFACE FINISH

| GLASS BLASTED OD | MACHINE FINISH OD | INSIDE POLISH                       |
|------------------|-------------------|-------------------------------------|
| 10               | Standard          | 1.6 $\mu$ m<br>(63 $\mu$ -in) Ra ID |

## (11) OPTIONS

**A0** None

# PR Sample Valve

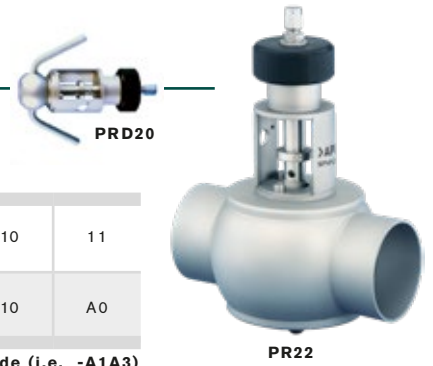

The order code is constructed as follows:

| POSITION | 1  | 2  | 3 | 4    | 5  | 6    | 7  | 8 | 9 | 10 | 11 |
|----------|----|----|---|------|----|------|----|---|---|----|----|
| CODE     | PR | 21 | W | DN25 | G4 | AA0A | 2X | M | E | 10 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)


## (1) VALVE TYPE

**PR** Sample Valve

## (8) SEAT TYPE

**PT** PTFE

## (2) HOUSING COMBINATIONS



\*Only available in size DN25

## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

## (3) PORT CONNECTIONS

**W** Buttweld

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH   |
|------------------|---|
| 10               | 1.6 $\mu\text{m}$ (63 $\mu\text{-in}$ ) Ra ID                     |
| 11               | 0.8 $\mu\text{m}$ (32 $\mu\text{-in}$ ) Ra ID with Electro-Polish |

## (4) PORT SIZES

|              |        |            |           |
|--------------|--------|------------|-----------|
| <b>DN25</b>  | DN 25  | <b>T10</b> | 1.0" Tube |
| <b>DN40</b>  | DN 40  | <b>T15</b> | 1.5" Tube |
| <b>DN50</b>  | DN 50  | <b>T20</b> | 2.0" Tube |
| <b>DN65</b>  | DN 65  | <b>T25</b> | 2.5" Tube |
| <b>DN80</b>  | DN 80  | <b>T30</b> | 3.0" Tube |
| <b>DN100</b> | DN 100 | <b>T40</b> | 4.0" Tube |

## (11) OPTIONS

|            |                                  |
|------------|----------------------------------|
| <b>A0</b>  | None                             |
| <b>A1</b>  | 3.1 certificate                  |
| <b>A1S</b> | 3.1 SPX Inspection Certification |
| <b>Z1</b>  | 1 drain pipe (Only PRD)          |
| <b>Z2</b>  | 2 drain pipes (Only PRD)         |

## (5) ACTUATOR

| IDENTIFIER | DESCRIPTION                                      |
|------------|--|
| G4         | Manual Handle                                    |
| G5         | Pneumatic Actuator and Manual Handle Combination |

## (6) CONTROL UNIT / FEEDBACK

| IDENTIFIER | DESCRIPTION       |
|------------|-------------------|
| AA0A       | No CU / Feedback* |

\*Prox holder brackets and sensors ordered separately

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| XX                | N/A               | Manual Handle Only    |
| 2X                | 3X                | No CU / Feedback      |

# VRA Vacuum Relief Valve



The order code is constructed as follows:

| POSITION | 1   | 2  | 3 | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|-----|----|---|------|----|------|----|----|---|----|----|
| CODE     | VRA | 11 | W | DN50 | SL | AA0A | 2X | TR | E | 11 | A0 |

\* Add multiple options to the end of code (i.e. -A1A3)

For assistance sizing of new vacuum relief valve applications, please contact factory or local sales agent.


## (1) VALVE TYPE

**VRA** Vacuum Relief

## (8) SEAT TYPE

**TR** Elastomeric Profile Seal

## (2) HOUSING COMBINATIONS



## (9) SEAL MATERIAL

**E** EPDM

**V** FPM

**H** HNBR

## (3) PORT CONNECTIONS

**W** Buttweld

**F** Hygienic Flange

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH                              |
|------------------|--|
| 10               | 1.6 µm (63 µ-in) Ra ID                     |
| 11               | 0.8 µm (32 µ-in) Ra ID with Electro-Polish |

## (4) PORT SIZES

**DN50** DN 50

**DN100** DN 100

**DN150** DN 150

## (11) OPTIONS

**A0** None

**B7** Large outlet port (only with VRA11)

**X1** 3.1 Flange

## (5) ACTUATOR

| TYPE | DESCRIPTION  |
|------|--------------|
| SL   | Seat Lifting |

## (6) CONTROL UNIT / FEEDBACK

| TYPE | DESCRIPTION       |
|------|-------------------|
| AA0A | No CU / Feedback* |

\*Prox holder brackets and sensors ordered separately

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU / Feedback      |

# SI Safety Valve



The order code is constructed as follows:

| POSITION | 1  | 2  | 3  | 4    | 5  | 6    | 7  | 8  | 9 | 10 | 11 |
|----------|----|----|----|------|----|------|----|----|---|----|----|
| CODE     | SI | 21 | FG | DN65 | SL | AA0A | 2X | TR | E | 11 | A1 |


\* Add multiple options to the end of code (i.e. -A1A3)

For assistance sizing of new safety relief valve applications, please contact factory or local sales agent.

## (1) VALVE TYPE

**SI** Safety Valve

## (2) HOUSING COMBINATIONS



## (3) PORT CONNECTIONS

**F** Hygienic Flange

## (4) PORT SIZES

**DN25** DN 25  
**DN40** DN 40  
**DN50** DN 50  
**DN65** DN 65  
**DN80** DN 80  
**DN100** DN 100

## (5) ACTUATOR

| TYPE | DESCRIPTION                |
|------|----------------------------|
| HSL  | Manual Handle Seat Lifting |
| SL   | Pneumatic Seat Lifting     |

## (6) CONTROL UNIT / FEEDBACK

| TYPE | DESCRIPTION       |
|------|-------------------|
| AA0A | No CU / Feedback* |

\*Prox holder brackets and sensors ordered separately

## (7) CONTROL UNIT / ACTUATOR CONNECTORS

| 6 MM AIR FITTINGS | 1/4" AIR FITTINGS | ELECTRICAL CONNECTION |
|-------------------|-------------------|-----------------------|
| 2X                | 3X                | No CU / Feedback      |

## (8) SEAT TYPE

**TR** Elastomeric Profile Seat

## (9) SEAL MATERIAL

**E** EPDM  
**V** FPM  
**H** HNBR

## (10) SURFACE FINISH

| GLASS BLASTED OD | INSIDE POLISH          |
|------------------|------------------------|
| 11               | 0.8 µm (32 µ-in) Ra ID |

## (11a) OPTIONS

**A1** 3.1 Certification (standard)

**(11b) PRESSURE RELIEF RANGE (REQUIRED)**

| VALVE SIZE | PRESSURE RELIEF RANGE (BAR) FOR FLUID AND GAS |              |             |             |            |                          |                          |            |             |             |              |             |            |
|------------|---|--------------|-------------|-------------|------------|--------------------------|--------------------------|------------|-------------|-------------|--------------|-------------|------------|
|            | E1  | E2           | E3          | E4          | E5         | E6                       | E7                       | E8         |             |             |              |             |            |
| DN25       | 0.3-1.5 FG                                    | 1.5-2.1 FG   | 2.1-2.3 F   | 2.3-3.2 F   | 3.2-4.3 F  | 4.3-6.0 F                | 6.0-7.8 F                | 7.8-10.0 F |             |             |              |             |            |
|            |   |              |             |             |            |                          |                          |            |             |             |              |             |            |
| DN40       | F1  | F2           | F3          | F4          | F5         | F6                       | F7                       | F8         | F9          | FA          |              |             |            |
|            | 0.3-0.75 FG                                   | 0.75-1.2 FG  | 1.2-2.1 FG  | 2.1-3.5 FG  | 3.5-4.0 FG | 4.0-4.6 F                | 4.6-5.4 F                | 5.4-7.2 F  | 7.2-9.2 F   | 9.2-10.0 F  |              |             |            |
| DN50       | G1  | GC           | G2          | G3          | G4         | G5                       | G6                       | G7         | G8          | G9          | GA           | GB          |            |
|            | 0.3-0.55 FG                                   | 0.55-0.85 FG | 0.85-1.5 FG | 1.5-2.5 FG  | 2.5-2.7 FG | 2.7-3.5 FG               | 3.5-4.1 F                | 4.1-5.25 F | 5.25-6.0 F  | 6.0-7.4 F   | 7.4-8.9 F    | 8.9-10.0 F  |            |
| DN65       | H1  | H2           | H3          | H4          | H5         | HD                       | HC                       | H6         | H7          | HB          | H8           | H9          | HA         |
|            | 0.3-0.6 FG                                    | 0.6-0.9 FG   | 0.9-1.4 FG  | 1.4-1.7 FG  | 1.7-2.2 FG | 2.2-2.6 FG               | 2.6-3.0 FG               | 3.0-3.5 F  | 3.5-4.3 F   | 4.3-4.95 F  | 4.95-5.75 F  | 5.75-6.95 F | 6.95-7.8 F |
| DN80       | J1  | J2           | J3          | J4          | J5         | J6                       | J9                       | J7         | JA          | JB          | J8           | JC          |            |
|            | 0.3-0.65 FG                                   | 0.65-0.9 FG  | 0.9-1.15 FG | 1.15-1.5 FG | 1.5-1.8 FG | 1.8-2.3 FG               | 2.3-2.8 FG               | 2.8-3.1 FG | 3.1-3.5 F   | 3.5-4.1 F   | 4.1-5.05 F   | 5.05-5.9 F  |            |
| DN100      | K9  | K1           | K2          | K3          | K4         | K5                       | K6                       | KB         | K7          | KA          | K8           |             |            |
|            | 0.45-0.60 F<br>0.45-0.50 G                    | 0.75-0.95 F  | 0.95-1.2 F  | 1.2-1.6 F   | 1.6-2.0 F  | 0.3-0.45 F<br>0.4-0.45 G | 0.6-0.75 F<br>0.5-0.70 G | 2.0-2.35 F | 2.35-2.75 F | 2.75-3.35 F | >3.35-3.80 F |             |            |

**Note: Exact relief set point is required when order submitted to factory. Certificate of pressure setting is supplied with valve.**

F = Rated for fluid pressure relief  
G = Rated for gas pressure relief

# Control Units for all Valves



Control Units are identified with a 4 digit code.

For valve models available with control units, please specify the four digit code per the below example:

| IDENTIFIER POSITION    | 1 & 2                                | 3 | 4 |
|------------------------|--------------------------------------|---|---|
| EXAMPLE CODE           | C4                                   | 1 | Y |
| EXAMPLE VALVE KEY CODE | SV1-316L-F-T20-A1-C41Y-20-TR-E-10-A0 |   |   |

## COMMON CONFIGURATIONS

| CONTROL UNIT IDENTIFIER | CU TYPE             | COMMUNICATION TYPE     | SOLENOIDS                | COMMON VALVE TYPE AVAILABLE   |
|-------------------------|---------------------|------------------------|--------------------------|---|
| AA0A                    | None                | None                   | 0 solenoids              | AP, CPV, DKR, MS/MSP, PR, RUF, SI, SV/SVS, BLV1, SW, SWmini, UF/UFR, VPN, VRA |
| HP0N                    | Prox Holder Bracket | None                   | 0 solenoid               | AP, D4NSL, D4SL, DT4, DA4, MS/MSP, SD/SDMS, SW, SWcip, SWmini                 |
| C41W                    | CU4                 | Direct Connect 24V DC  | 1 solenoids              | D4NSL, DKR, MS/MSP, SV/SVS, BLV1, SW, SWcip, SWmini                           |
| C49W                    | CU4                 | Direct Connect 24V DC  | 1 solenoid w/NOT Element | MS, SV/SVS, BLV1, SD/SDMS, SW   |
| C43W                    | CU4                 | Direct Connect 24V DC  | 3 solenoids              | D4SL, DT4, DA4, DP4   |
| C41U                    | CU4                 | Direct Connect 110V AC | 1 solenoid               | SV/SVS, BLV1  |
| C49U                    | CU4                 | Direct Connect 110V AC | 1 solenoid w/NOT Element | SV/SVS, BLV1  |
| C41Y                    | CU4                 | AS-i 62                | 1 solenoid               | D4NSL, DKR, MS/MSP, SV/SVS, BLV1, SW, SWcip, SWmini                           |
| C49Y                    | CU4                 | AS-i 62                | 1 solenoid w/NOT Element | MS, SD/SDMS, SV/SVS, BLV1, SW   |
| C43Y                    | CU4                 | AS-i 62                | 3 solenoids w/SLD        | D4SL, DT4, DA4, DP4   |
| CP1W                    | CU4plus             | Direct Connect 24V DC  | 1 solenoid               | D4NSL, DKR, MS, MSP, SV/SVS, BLV1, SW, SWcip, SWmini                          |
| CP9W                    | CU4plus             | Direct Connect 24V DC  | 1 solenoid w/NOT Element | MS, SV/SVS, BLV1, SD/SDMS, SW   |
| CP3W                    | CU4plus             | Direct Connect 24V DC  | 3 solenoids              | D4SL, DT4, DA4, DP4   |
| CP1Y                    | CU4plus             | AS-i 62                | 1 solenoid               | D4NSL,DKR, MS, MSP, SV/SVS, BLV1, SW, SWcip, SWmini                           |
| CP9Y                    | CU4plus             | AS-i 62                | 1 solenoid w/NOT Element | MS, SV/SVS, BLV1, SD/SDMS, SW   |
| CP3Y                    | CU4plus             | AS-i 62                | 3 solenoids              | D4SL, DT4, DA4, DP4   |
| CX1W                    | ATEX/IECEX CU       | Direct Connect 24V DC  | 1 solenoid               | D4 NSL, MS, MSP, SV/SVS, SW   |
| CX9W                    | ATEX/IECEX CU       | Direct Connect 24V DC  | 1 solenoid w/NOT Element | MS, SD/SDMS, SV/SVS, SW, SW   |
| CX3W                    | ATEX/IECEX CU       | Direct Connect 24V DC  | 3 solenoids              | D4 SL   |
| CP1S                    | CU4plus             | IO-Link                | 1 solenoid               | SV/SVS, SW, SWmini, MS, MSP, SWCIP, D4NSL, DKR, BLV                           |
| CP9S                    | CU4plus             | IO-Link + NOT element  | 1 solenoid + NOT element | SV/SVS, SW, MS, BLV, SD, SDMS   |
| CP3S                    | CU4plus             | IO-Link                | 3 solenoid               | D4SL, DA4, DT4, DP4, DU4  |

| CONTROL UNIT TYPE | DESCRIPTION  |
|-------------------|--|
| C4                | CU4 model with 2 Hall sensors for feedback   |
| CP                | CU4plus model with Teach-in/Linear sensor for feedback and SLD                                 |
| CX                | ATEX and IECEX certified CU model with 2 sensors for feedback (only for Direct Connect 24V DC) |
| HP                | Prox holder bracket compatible with 1 or 2 feedback positions. Sensors ordered separately      |

**SLD = Seat Lift Detection for Mix Proof Valves**


To order spare control units, it is necessary to provide the valve model and size. Please contact factory or local sales agent.

# L'expertise au service de vos process

## Une gamme de premier rang mondial dédiée à vos process

AxFlow France, filiale à 100% du Groupe AxFlow, offre une gamme complète et de haute qualité d'équipements dédiés à la gestion des fluides. Cette gamme se compose de pompes volumétriques et centrifuges, de systèmes de dosage/mélange, d'agitateurs, d'échangeurs thermiques, de vannes, d'homogénéisateurs, de séparateurs centrifuges, d'équipements dédiés à l'environnement et à l'analyse.

A cela nous apportons une véritable valeur ajoutée grâce à une offre complète de services incluant le support technique de nos spécialistes, la maintenance préventive et curative de vos produits, la livraison sur stock etc.

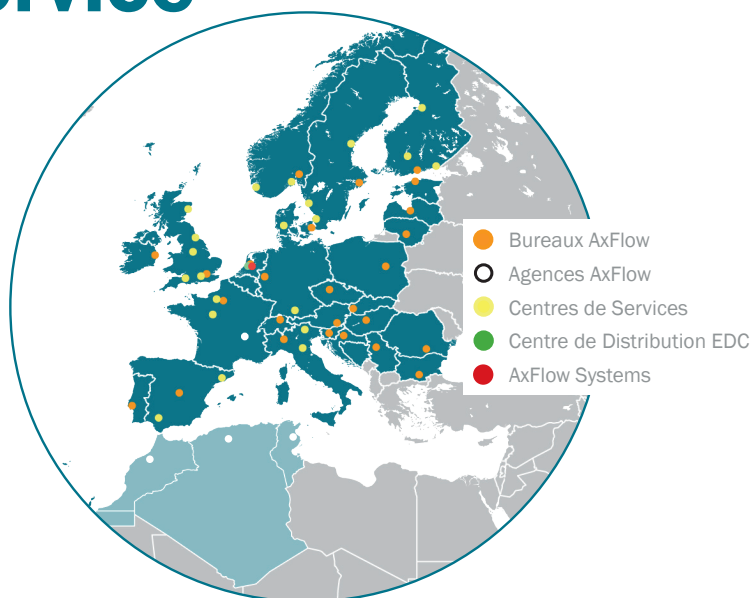

### Conseil

Notre personnel hautement qualifié et formé à vos métiers vous conseille sur le choix des équipements et solutions techniques dont vous avez besoin en effectuant un audit de votre process.



### Livraison sur stock

Notre centre de distribution européen situé aux Pays-Bas nous permet de garantir des délais de livraison de nos pièces détachées sous 24 à 48h. Nous disposons de plus de 6 600 références en stock et d'un stock local de 10 000 pièces.



### Maintenance et Réparation 7j/7j

AxFlow propose toutes opérations de maintenance préventive et curative sur vos produits en atelier ou dans vos locaux. Grâce à nos 5 centres de services de Tours, d'Evreux, de Valenciennes, de Saint Brieuc, Dinan et l'ouverture prochaine de nouveaux centres, nos experts sont plus proches de vous et peuvent intervenir sur toute la France, la Belgique et le Luxembourg.



### Equipements clé en main

Petit, moyen ou grand. Une question de perspective, pas de taille! AxFlow propose des ensembles clés en main conçus et fabriqués spécifiquement pour votre application et votre site.

Contactez-nous!



**+33 (0)1 30 68 41 41 - info@axflow.fr**

Pour toute autre information sur nos produits, rendez-vous sur  
**www.axflow.fr**

*fluidity.nonstop*® représente notre engagement en faveur d'un niveau inégalé de service, de qualité produit, de performances et de compétences. Nous sommes le premier spécialiste européen du transfert de « liquides difficiles », et nous mettons tout en oeuvre pour maintenir cette position.

**Siège social** - 87, rue des Poiriers - ZA Sainte Apolline - 78370 Plaisir  
Tél: +33 (0)1 30 68 41 41 - Fax: +33(0)1 30 68 41 00

**Site de Tours** - 3, rue René Cassin - 37390 Notre Dame d'Oé  
Tél.: +33(0)2 47 458 458

**Site d'Evreux** - Rue de la Croix Prunelle - 27220 Saint-André-de-l'Eure  
Tél.: +33(0)2 32 37 49 06

E-mail: info@axflow.fr - Site internet: www.axflow.fr



**AXFLOW**  
*fluidity.nonstop*