

# WILDEN®

## Introducing Velocity with Versatility



### Velocity Series Pumps

Introducing the new Wilden® Velocity Series compact pump. Featuring the industry's first detachable mounting foot, the Velocity Series air-operated double-diaphragm (AODD) pump has adaptable mounting capabilities, is competitively priced and is the complete package for all small-dosing applications.

#### Mounting Options

The Velocity Series can be easily reoriented by loosening a single screw. It has been designed with OEM systems and skids in mind and fits perfectly into restricted spaces.

#### Pump Performance

Incorporating a proven and simple air distribution system (ADS) with only two moving parts, the Velocity Series offers long-term reliability and reduces maintenance and downtime. The Velocity Series also features improved dry suction lift at all operating parameters for better priming under a wide variety of system conditions.

Contact your Authorized Wilden Distributor today!

#### Features & Benefits:

- Multiple mounting options
- 4.3 m (14.2') of dry suction lift for better priming
- Differential pressures as low as 0.28 bar (4 psig) and start up pressures as low as 1.03 bar (15 psig)
- Bore-seal design eliminates effects of torque decay
- Interchangeable footprint with competitor and previous Wilden designs


#### Markets and Applications:

- Chemical dosing
- Paint and inks
- Surface treatment
- Clean-in-place (CIP) systems
- Lube oil
- Commercial laundry
- Additive injection
- Sampling

Where Innovation Flows





# Move with Velocity Excel with Versatility

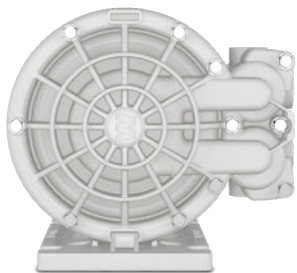

SPECIFICATIONS	
Size	6 mm (1/4")
Materials of Construction	Polypropylene, PVDF
Elastomer Options	PTFE, Wil-Flex™
Ball and Seats Assembly	Poly-Wil-Flex, Poly-PTFE, PVDF-Wil-Flex, PVDF-PTFE
Max. Pressure	6.9 bar (100 psig)
Max. Flow Rate	21.6 lpm (5.7 gpm)
Suction Lift	4.3 m (14.2') Dry, 6.2 m (20.4') Wet
Displacement Per Stroke	0.04 L (0.01 gal)
Max. Size Solids	0.8 mm (1/32")

## Multiple Mounting Options

One of the key benefits to the unique design of the Wilden V2550 Velocity Series pump is flexibility. With a detachable foot and 4 port manifold, the Velocity Series has numerous vertical and horizontal mounting options. These features allow the pump to easily connect to any customer's system.

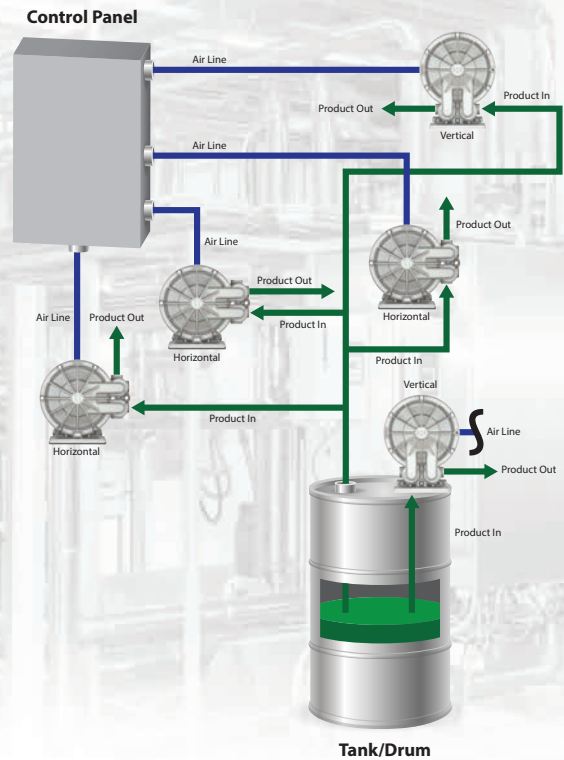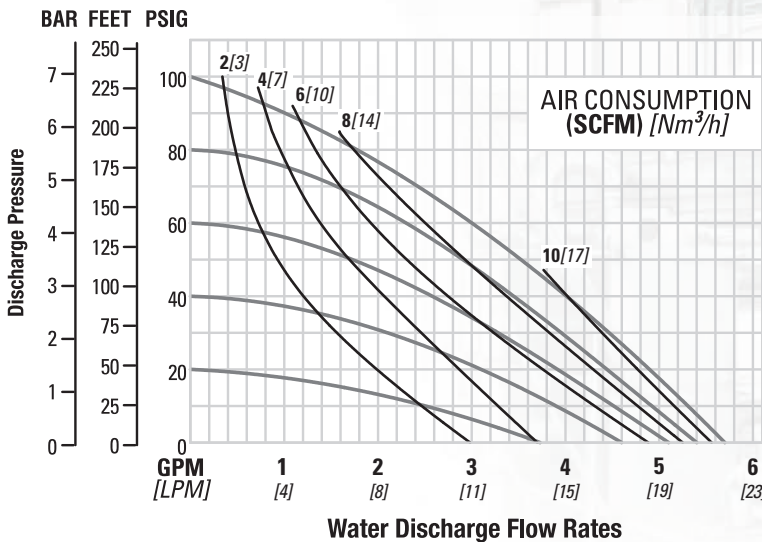

**WILDEN®**

PSG

22069 Van Buren Street, Grand Terrace, CA 92313-5651

P: +1 (909) 422-1730 • F: +1 (909) 783-3440

wildenpump.com

Authorized PSG® Partner: