


ANDRITZ free-flow pump

VP/CP series

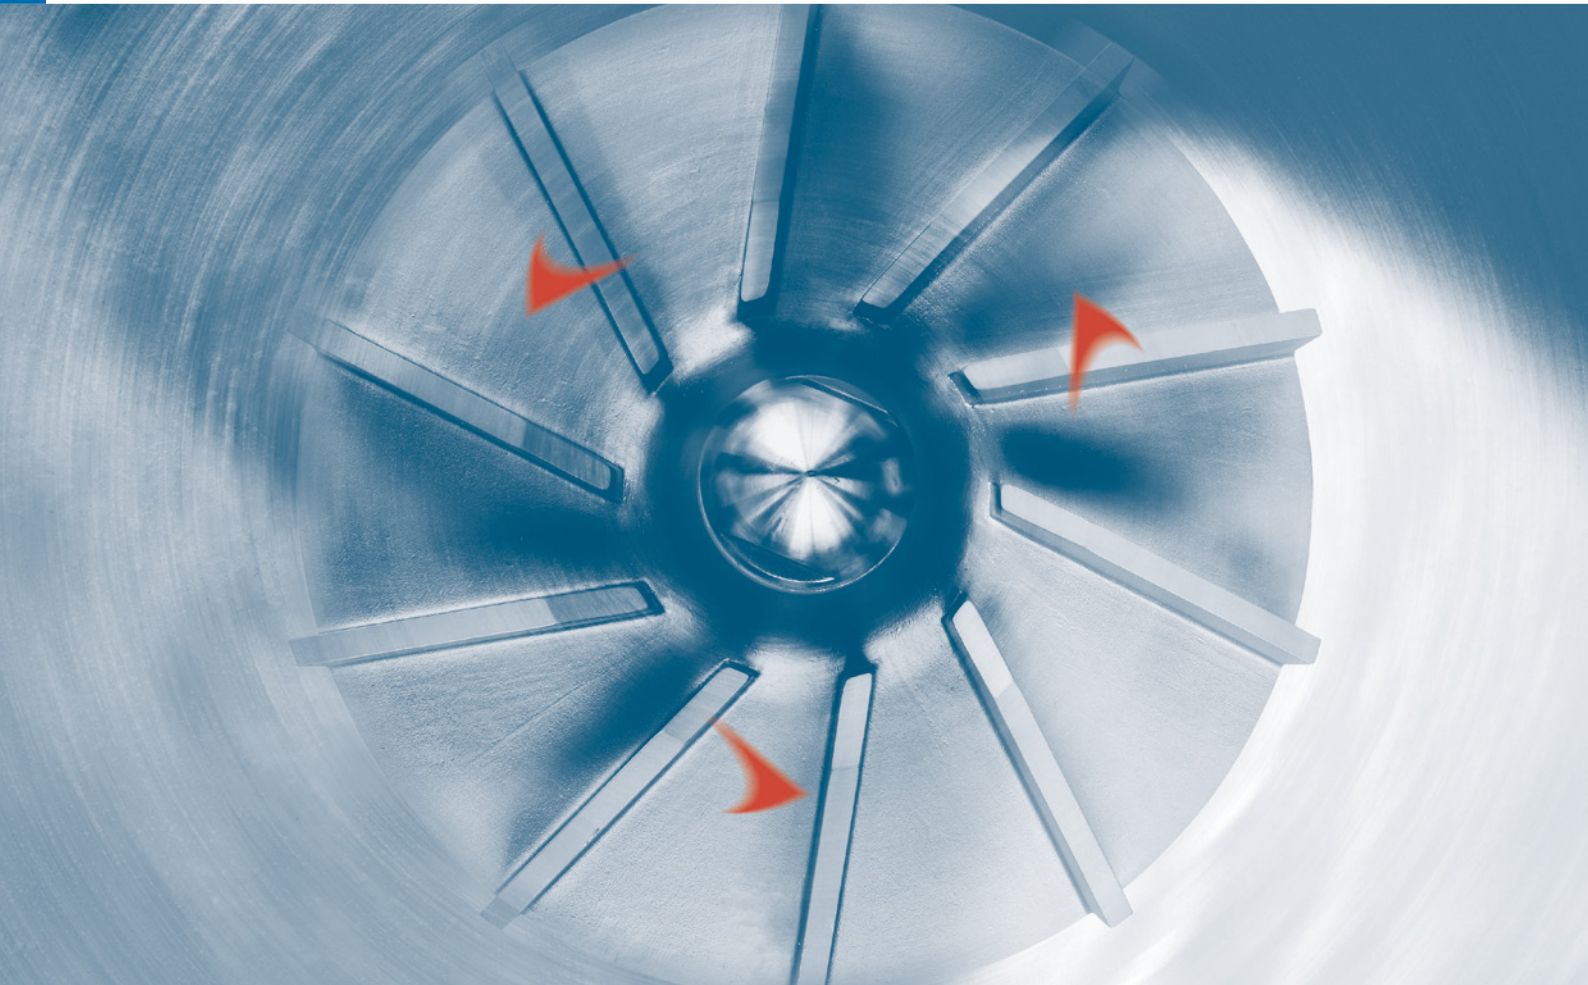

For the most demanding conveyance tasks

For over 100 years, ANDRITZ has been a byword for competence and innovation in the design of centrifugal pumps.

ANDRITZ VP/CP series free-flow pumps are advancements of our proven pump technology. The CP series is characterized by an exceptionally large open cross section and open channel in the spiral casing. Both pump types fulfil high expectations regarding efficiency, life cycle, maintenance friendliness and economic efficiency.

All pump parts are manufactured according to the highest quality standards in our ISO certified workshops. The superior quality of our products derives from compliance with these stringent requirements.



The facts:

- Flow rates up to 1,500 m³/h
- Heads up to 75 m
- Nominal pressure up to 16 bar
- Temperature up to 120°C
- Free passage up to 140 mm

Technology to convince you

The high standard of our centrifugal pumps from the VP/CP series stems from our long-term experience in hydraulic machine design and comprehensive process know-how.

Safe and reliable operation

Conveyance of coarse media requires special measures in terms of design and materials used. ANDRITZ has developed the VP/CP free-flow pump series especially for these applications. The use of pump components from our modular system ensures high availability of spares!




VP series

for suspensions with up to 60 mm particle size

Fields of application:

- Suspensions, slurries
- Media with high air content
- Stock suspensions with light fraction
- Sludge
- Industrial waste water

An economical option for difficult media!

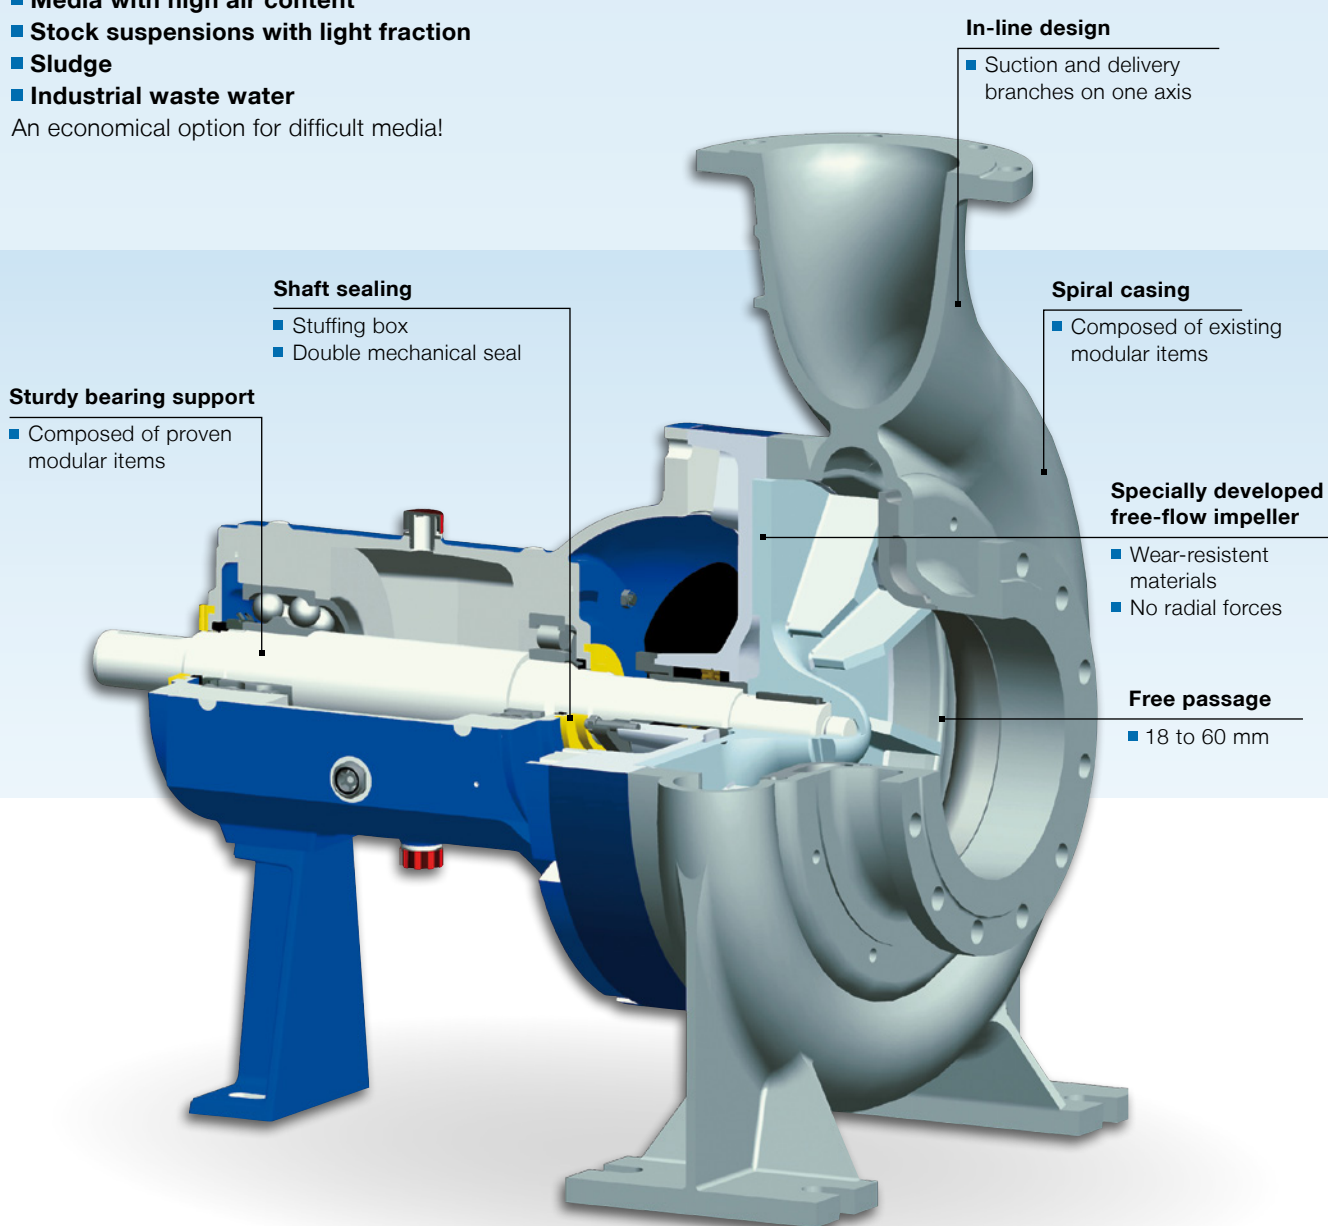

In-line design

- Suction and delivery branches on one axis

Shaft sealing

- Stuffing box
- Double mechanical seal

Sturdy bearing support

- Composed of proven modular items

Spiral casing


- Composed of existing modular items

Specially developed free-flow impeller

- Wear-resistant materials
- No radial forces

Free passage

- 18 to 60 mm

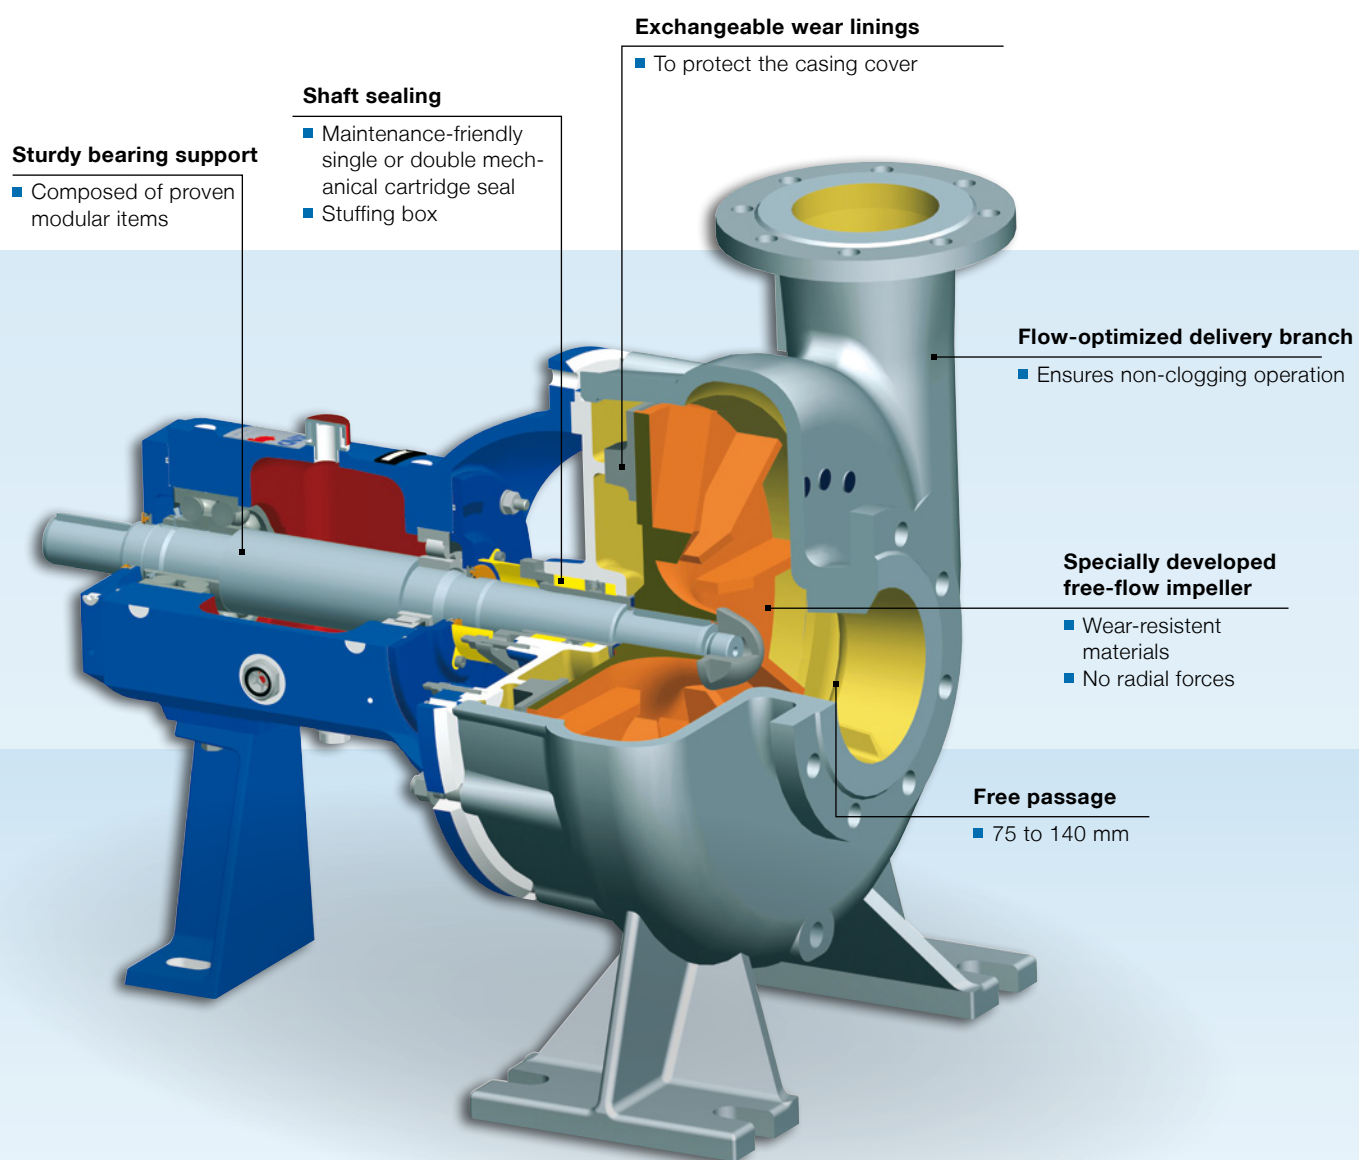

CP series


for suspensions with up to 140 mm particle size

Fields of application:


- Wood chips
- Municipal waste water
- Extremely abrasive media
- Slurries containing large particles
- Very long fibres

Suitable for very rough conditions without having to compromise!

Characteristic curve for VP

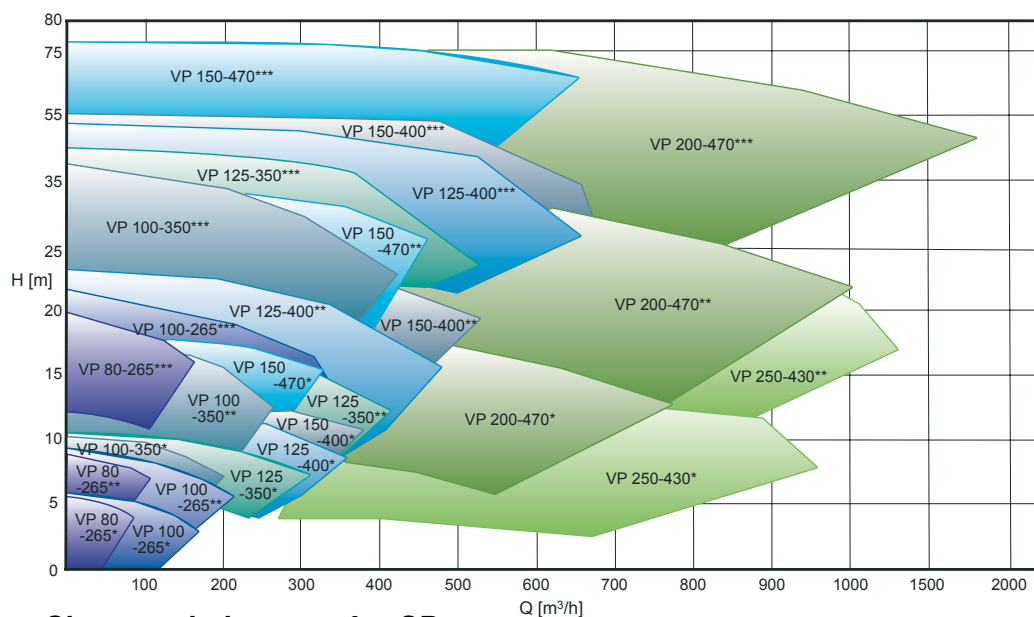

Characteristic curve for CP

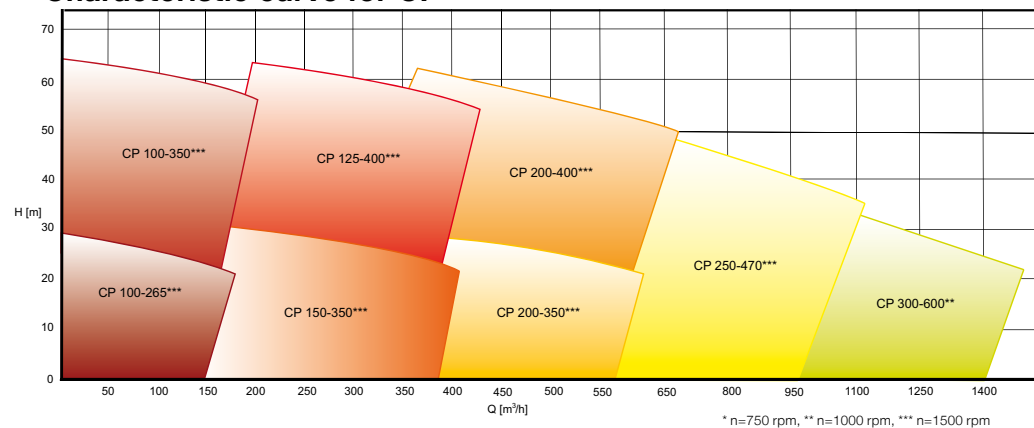

VP/CP series	EN-GJL 250	1.4460	1.4021	1.4462	1.4517	1.4517 hardened
Impeller		■ (CP)			■	
Volute casing	■ (VP)	■				
Bearing housing	■					
Front and rear lining		■				■ (CP)
Casing cover		■				
Stuffing box body		■			■	
Shaft			■ (VP)	■		■

European standard		US standard	
Number	Name	Grade	UNS
EN-JL1040	EN-GJL-250	Class 40B	/
1.4460	X3CrNiMoN27-5-2	Grade 1A	J93370
1.4021	X20Cr13	420	S42000
1.4462	X2CrNiMoN22-5-3	S32205	S32205
1.4517	GX2CrNiMoCuN25-6-3-3	Grade 1C	J93373
1.4517 hardened	GX2CrNiMoCuN25-6-3-3	Grade 1C	J93373

Close to our customers



ANDRITZ AG

Stattegger Strasse 18
8045 Graz, Austria
Phone: +43 (316) 6902-0
Fax: +43 (316) 6902-413
pumps@andritz.com



www.andritz.com/pumps